


BODYCRAFT

LCS-4 COMMERCIAL MULTI-STATION GYM OWNER'S MANUAL

Serial Number Location




**Record your Serial number
and purchase date here:**

S/N _____

DATE: _____

DEALER: _____

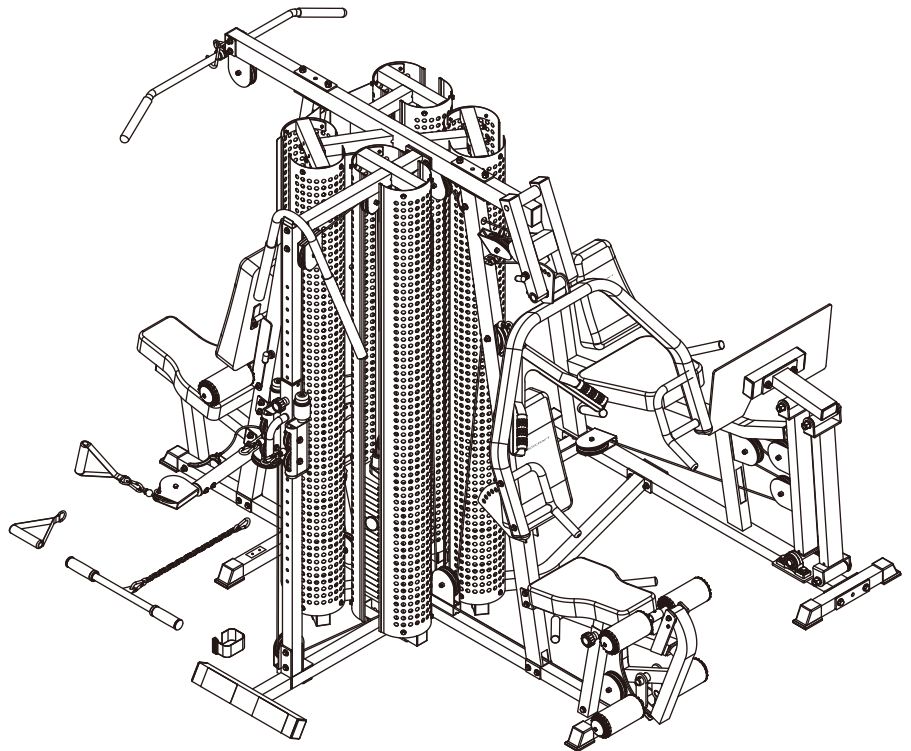

**Model No. LCS-4
MA429
BODYCRAFT**

**Fitness Authority Industrial Co., LTD.
No. 15, Xiangxue Rd., Dali Dist.,
Taichung City 41275, Taiwan.**

Congratulations and Thank You!

Thank you for selecting the **BODYCRAFT LCS-4**. The **BODYCRAFT LCS-4** offers an impressive array of strength training exercises to develop every major muscle group of the body. Whether your goal is cardiovascular fitness, a shapely, toned body or dramatic muscle size and strength, the **BODYCRAFT LCS-4** will help you achieve the results you want. For your safety and benefit, read this manual and the accompanying literature before using the **BODYCRAFT LCS-4**. Keep this manual for future reference. If you have additional questions, please call your local **BODYCRAFT LCS-4** Dealer.

www.ibodycraft.com

Important Safety Notes

There is a risk assumed by individuals who use this type of equipment. Before beginning this or any other exercise program consult your physician. This is especially important for individuals over the age of 35 or persons with preexisting health problems. Recreation Supply, Inc. assumes no responsibility for personal injury or property damage sustained by or through use of this product.


1. **This product must be assembled on a flat, level surface to assure its proper function.**
2. **Clean pads and frame on a regular basis. We recommend warm, soapy water. Do not use harsh or abrasive chemicals.**
3. **Inspect and tighten all parts before every use. Replace any worn parts immediately. Failure to do so may result in serious injury.**
4. **Keep children away from the BODYCRAFT LCS-4 at all times.**
5. **Keep your hands away from cables and pulleys during operation.**
6. **Keep your hands away from moving parts other than the designated handles.**
7. **Make certain all cables are seated within the pulleys before every use.**
8. **Exercise with care to avoid injury.**
9. **If you are unsure about the proper use of the BODYCRAFT LCS-4 call your local BODYCRAFT dealer or our customer service department.**

QUESTIONS?

As a quality exercise equipment supplier we are committed to your complete satisfaction. If you have questions, or find missing or damaged parts, we will guarantee your complete satisfaction through our authorized dealer service centers or our home office customer service department. Please call your local dealer.

www.ibodycraft.com

Gym Placement Planner

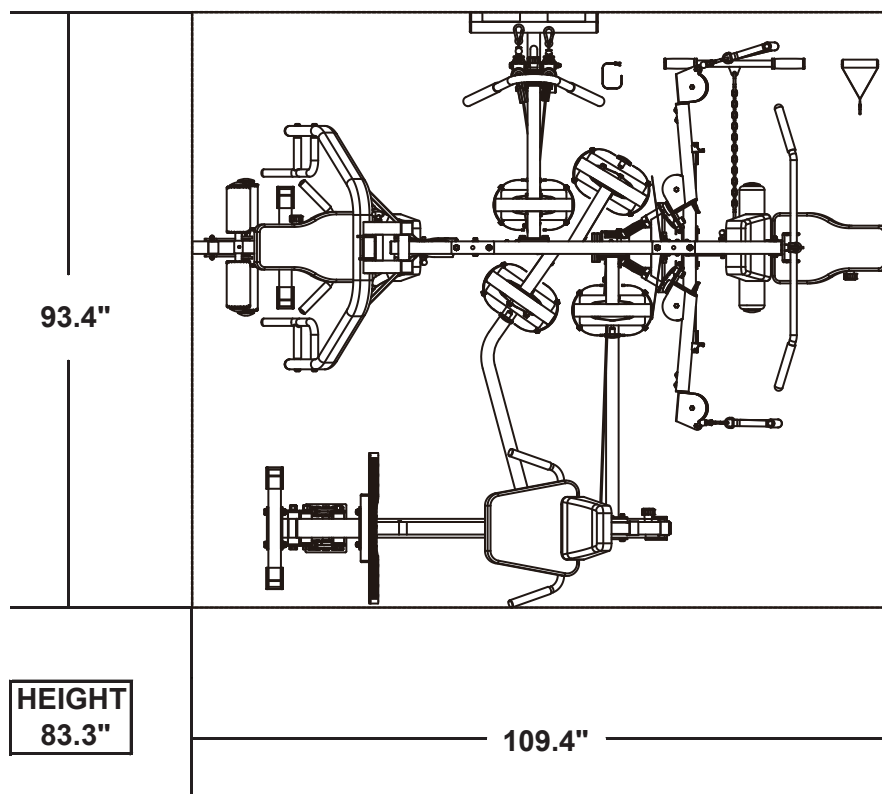


Recommended Tools for Assembly


Ratchet
 9/16" Socket
 3/4" Socket
 9/16" Combination Wrench
 3/4" Combination Wrench
 Adjustable Wrench
 Rubber Mallet
 Metric Allen Key Set

Important Notes and Tips:

1. Do not tighten bolts until instructed.
2. Two people are required for the safe assembly of this product.
3. Use window cleaner or water to assist with sliding roller pads on to tubes.
4. Apply silicone lubricant onto guide rods prior to weight plate installation.
5. Please allow plastic parts to acclimate to room temperature before installation or they may be damaged.
6. Carefully install plastic caps using a rubber mallet.
7. When measuring bolt lengths, only measure the shank, as shown below.

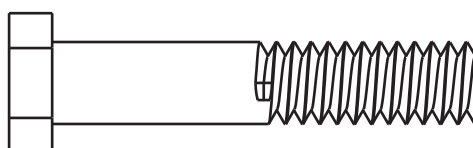

i.e. 2-1/4" Hex Bolt




LCS-4 PARTS LIST 1




NOTE: If you are missing a listed part, it likely has been pre-installed in our factory for quality control purposes. Please continue with assembly.


***Parts images are not to scale.**

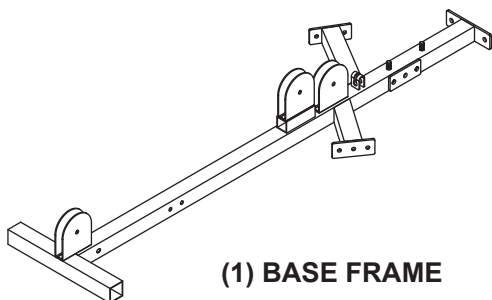


(1) BASE FRAME




(2) BASE STABILIZER

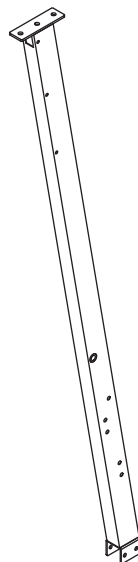


(3) REAR CABLE ARM UPRIGHT

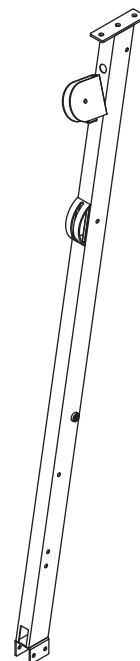


(4) FRONT PRESS ARM UPRIGHT




**(5) WEIGHT STACK
BASE X 2pcs**




**(6) TOP GUIDE ROD
RETAINER X 2pcs**




(7) FRONT STABILIZER



**(8) CABLE ARM
CONNECTOR**




(9) HAND HOLDER

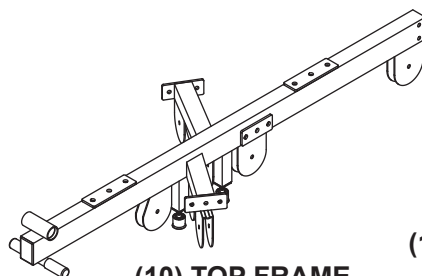

(10) TOP FRAME




**(11) LAT BAR
HOLDER**




**(12) PRESS ARM
SELECTOR**




**(13) GUIDE ROD
X 4pcs**




**(14) FRONT SEAT
FRAME**




**(18) FRONT CHROME
SEAT ADJUSTER**

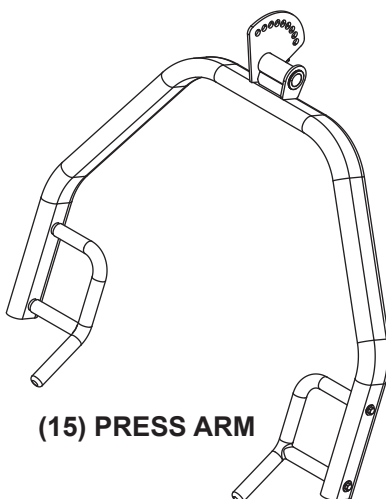


(15) PRESS ARM



(19) LEG EXTENSION ARM



(20) REAR SEAT FRAME



**(21) REAR CHROME
SEAT ADJUSTER**



**(22) SEAT BACK
ADJUSTER**



**(23) SEAT BACK
ADJUSTER**



**(24) METAL HINGE
FOR SEAT BACK
ADJUSTER X 4pcs**

LCS-4 PARTS LIST 2




NOTE: If you are missing a listed part, it likely has been pre-installed in our factory for quality control purposes. Please continue with assembly.


***Parts images are not to scale.**




(25) SINGLE PULLEY BLOCK




(27) CABLE ARM ASSEMBLY




(28) CABLE ARM X 2pcs



(30) ADJUSTABLE PULLEY BLOCK X 2pcs




(31) 1" CHROME ROLLER TUBE X 2pcs



(32) 25.4mm PIVOT AXLE




(33) 20mm PIVOT AXLE




(38R) RIGHT POSTER PLATE




(39L) LEFT POSTER PLATE



(35) WEIGHT STACK SHROUD X 4pcs

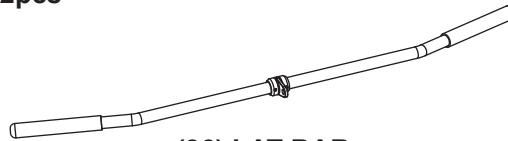

(36) LAT BAR




(37) LOW ROW BAR



(51) 1" PLUG X 2pcs



(47) PULLEY GUIDE BRACKET X 4pcs



(48R) RIGHT LEG EXTENSION ARM



(49L) LEFT LEG EXTENSION ARM



(50) 40 X 80mm PRESS ARM PLUG X 2pcs



(52) SEAT SPRING X 2pcs



(62) 50mm SQ. CAP X 5pcs



(64) 50mm SQ. PLUG X 8pcs



(66) PLASTIC WASHER X 6pcs



(67) 50 X 75mm RECT. PLUG



(68) 25 X 50mm RECT. PLUG X 3pcs




(69) PLASTIC COVER X 6pcs



(72) PLASTIC GUIDE ROD HOLDER X 8pcs



(79) SPRING KNOB X 2pcs



(80) SELECTOR PIN X 2pcs




(81) L PIN



(82) 114mm PULLEY X 24pcs



(84) RUBBER DONUT X 4pcs




(88) FOAM PAD & (89) FOAM PAD COVER X 6pcs

LCS-4 PARTS LIST 3



NOTE: If you are missing a listed part, it likely has been pre-installed in our factory for quality control purposes. Please continue with assembly.

*Parts images are not to scale.



(94) SELECTOR ROD
X 2pcs




(95) TOP PLATE
X 2pcs




(96) 10 LB. PLATE
X 38pcs




(97) SNAP HOOK
X 4pcs




(99) AB CRUNCH STRAP



(100) SINGLE HANDLE
X 2pcs




(102) BACK PAD
X 2pcs



(103) SEAT PAD
X 2pcs



(106) TRIM FOR WEIGHT SHROUD
X 8pcs

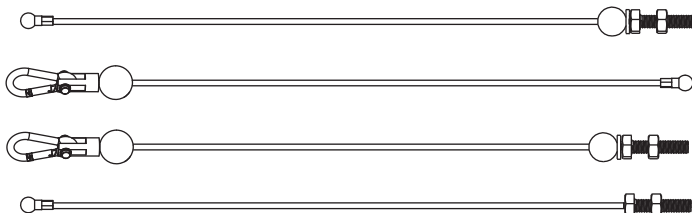

(107) PRESS ARM CABLE

(108) AB CRUNCH CABLE

(109) TOP CABLE

(110) CABLE ARM CONNECTING CABLE



(170) LINK CHAIN




(171) CABLE GUIDE PLATE

NO. DESCRIPTION

QTY.

122	1/2" X 4-1/4" HEX BOLT	4
123A	1/2" X 3-1/4" HEX BOLT	2
125	3/8" X 5-3/4" HEX BOLT	1
126	3/8" X 4-3/4" HEX BOLT	2
128	3/8" X 3" HEX BOLT	24
130	3/8" X 2-3/4" HEX BOLT	1
131	3/8" X 2-1/2" HEX BOLT	2
132	3/8" X 1-3/4" HEX BOLT	18
133	3/8" X 1-3/4" HEX THREADED BOLT	4
134	3/8" X 1" HEX THREADED BOLT	8
135	5/16" X 1/2" HEX THREADED BOLT	16
142	TOP PLATE BOLT	2
143	8mm X 53mm FEMALE BOLT FOR POSTER	3
144	6mm X 12mm MALE NUT FOR POSTER	3
146	1/2" WASHER	12
147	3/8" WASHER	70
148	5/16" WASHER	16
153	1/2" NYLON NUT	6
154	3/8" NYLON NUT	49
172	3mm HEX WRENCH	1
173	4mm HEX WRENCH	1
174	5mm HEX WRENCH	1
175	6mm HEX WRENCH	1

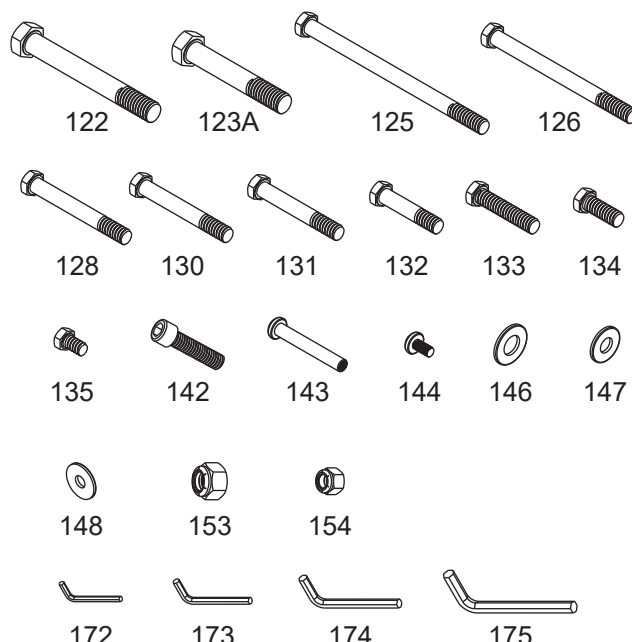

LCS-4 LEG PRESS PARTS LIST 4




NOTE: If you are missing a listed part, it likely has been pre-installed in our factory for quality control purposes. Please continue with assembly.

*Parts images are not to scale.

(201) BASE STABILIZER



(202) LEG PRESS MAIN FRAME




(203) LEFT LEG PRESS HANDLE




(204) RIGHT LEG PRESS HANDLE




(205) LONG LEG PRESS CONNECTOR

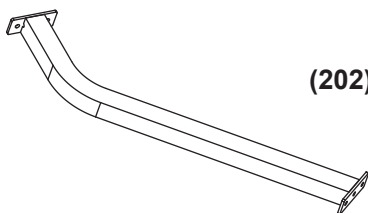


(206) FRONT LEG PRESS SUPPORT



(207) WEIGHT BASE CONNECTOR




(208) WEIGHT STACK BASE



(209) REAR LEG PRESS SUPPORT




(210) FOOT PLATE CONNECTOR



(211) FOOT PLATE



(212) BACK PAD ADJUSTER




(213) LEG PRESS CABLE



(13) GUIDE ROD X 2pcs



(35) WEIGHT STACK SHROUD X 2pcs



(61) 75 X 45mm RECT. CAP



(62) 50mm SQ. CAP X 2pcs



(63) 45 X 75mm RECT. PLUG X 3pcs



(64) 50mm SQ. PLUG X 2pcs



(65) 45mm SQ. PLUG



(70) BEARING HOUSING X 2pcs




(72) PLASTIC GUIDE ROD HOLDER X 4pcs



(79) SPRING KNOB



(80) SELECTOR PIN




(82) 114mm PULLEY X 7pcs



(84) RUBBER DONUT X 2pcs



(94) SELECTOR ROD



(95) TOP PLATE



LCS-4 LEG PRESS PARTS LIST 5




NOTE: If you are missing a listed part, it likely has been pre-installed in our factory for quality control purposes. Please continue with assembly.


***Parts images are not to scale.**



**(96) 10 LB. PLATE
X 19pcs**



**(104) BACK
PAD**




(105) SEAT PAD



**(106) TRIM FOR WEIGHT
SHROUD X 4pcs**

NO.	DESCRIPTION	QTY.
-----	-------------	------

121	5/8" X 6-1/2" HEX BOLT	3
123B	1/2" X 3-1/8" HEX BOLT	2
124	1/2" X 1-3/4" HEX THREADED BOLT	4
127	3/8" X 4-1/4" HEX BOLT	4
128	3/8" X 3" HEX BOLT	2
129	3/8" X 2-3/4" HEX THREADED BOLT	1
130	3/8" X 2-3/4" HEX BOLT	1
132	3/8" X 1-3/4" HEX BOLT	5
134	3/8" X 1" HEX THREADED BOLT	4
135	5/16" X 1/2" HEX THREADED BOLT	8
142	TOP PLATE BOLT	1
145	5/8" WASHER	6
146	1/2" WASHER	16
147	3/8" WASHER	17
148	5/16" WASHER	8
152	5/8" NYLON NUT	3
153	1/2" NYLON NUT	6
154	3/8" NYLON NUT	12
169	1/2" X 1-1/4" HEX THREADED BOLT	4



121




129




145



152



123



130



146



153



124




132



147



154



127



134



148



169



128



135




142

LCS-4 CABLE COLUMN PARTS LIST 6




NOTE: If you are missing a listed part, it likely has been pre-installed in our factory for quality control purposes. Please continue with assembly.


**Parts images are not to scale.*




**(301) WEIGHT
STACK BASE**



**(302) TOP GUIDE
ROD RETAINER**



**(303) FRONT
STABILIZER**




**(304) CABLE
HEIGHT
ADJUSTER**



**(308) DOUBLE
PULLEY
BRACKET**



(306) CHROMED UPRIGHT




**(307) HAND
HOLDER**



**(309) 90mm
PULLEY X 6pcs**



**(310) 3/8"
BUSHING
X 8pcs**




**(314) CABLE
COLUMN CABLE**

**(315) REMOVABLE
END CABLE
ARM CABLE**



**(320) 50 X 100mm
PULLEY HOUSING
COVER X 2pcs**



(13) GUIDE ROD X 2pcs



**(35) WEIGHT STACK
SHROUD X 2pcs**




**(64) 50mm SQ.
PLUG X 3pcs**



**(67) 50 X 75mm
RECT. PLUG X 2pcs**



**(72) PLASTIC GUIDE
ROD HOLDER X 4pcs**



(80) SELECTOR PIN




**(82) 114mm PULLEY
X 2pcs**



**(84) RUBBER
DONUT X 2pcs**



(86) CAP X 2pcs



(94) SELECTOR ROD




(95) TOP PLATE



**(96) 10 LB. PLATE
X 19pcs**



**(97) SNAP HOOK
X 3pcs**



**(100) SINGLE
HANDLE X 2pcs**



**(101) ANKLE
STRAP**

(106) TRIM FOR WEIGHT SHROUD X 4pcs

NO. DESCRIPTION

QTY.

128	3/8" X 3" HEX BOLT	3
132	3/8" X 1-3/4" HEX BOLT	6
135	5/16" X 1/2" HEX THREADED BOLT	8
142	TOP PLATE BOLT	1
146	1/2" WASHER	4
147	3/8" WASHER	7
148	5/16" WASHER	8
154	3/8" NYLON NUT	10
169	1/2" X 1-1/4" HEX THREADED BOLT	4
318	3/8" X 3-1/8" HEX HEAD BOLT	2



128



132



135



142



146



147




148



154



169




318

STEP 1 BASE FRAME ASSEMBLY


To ease the assembly process, do not tighten bolts until instructed.

1. Attach Base Frame (1) and Front Stabilizer (7) to Base Stabilizer (2), using two 1/2" X 3-1/4" Hex Head Bolts (123A), four 1/2" Washers (146) and two 1/2" Nuts (153). Attach five 50mm SQ. Caps (62) onto Front & Rear Base Frame (1 & 7) and Base Stabilizer (2).
2. Attach two Weight Stack Bases (5) to Base Frame (1) using two 3/8" X 3" Hex Bolts (128), two 3/8" Washers (147) and two 3/8" Nylon Nuts (154).
3. Attach Front Upright (4) to Base Frame (1) using two 3/8" X 3" Hex Head Bolts (128), four 3/8" Washers (147) and two 3/8" Nylon Nuts (154). Repeat same process for Rear Upright (3) on Front Stabilizer (7). Screw Shorter Pop Pins (73) into Front Upright (4) and Rear Upright (3) as shown.

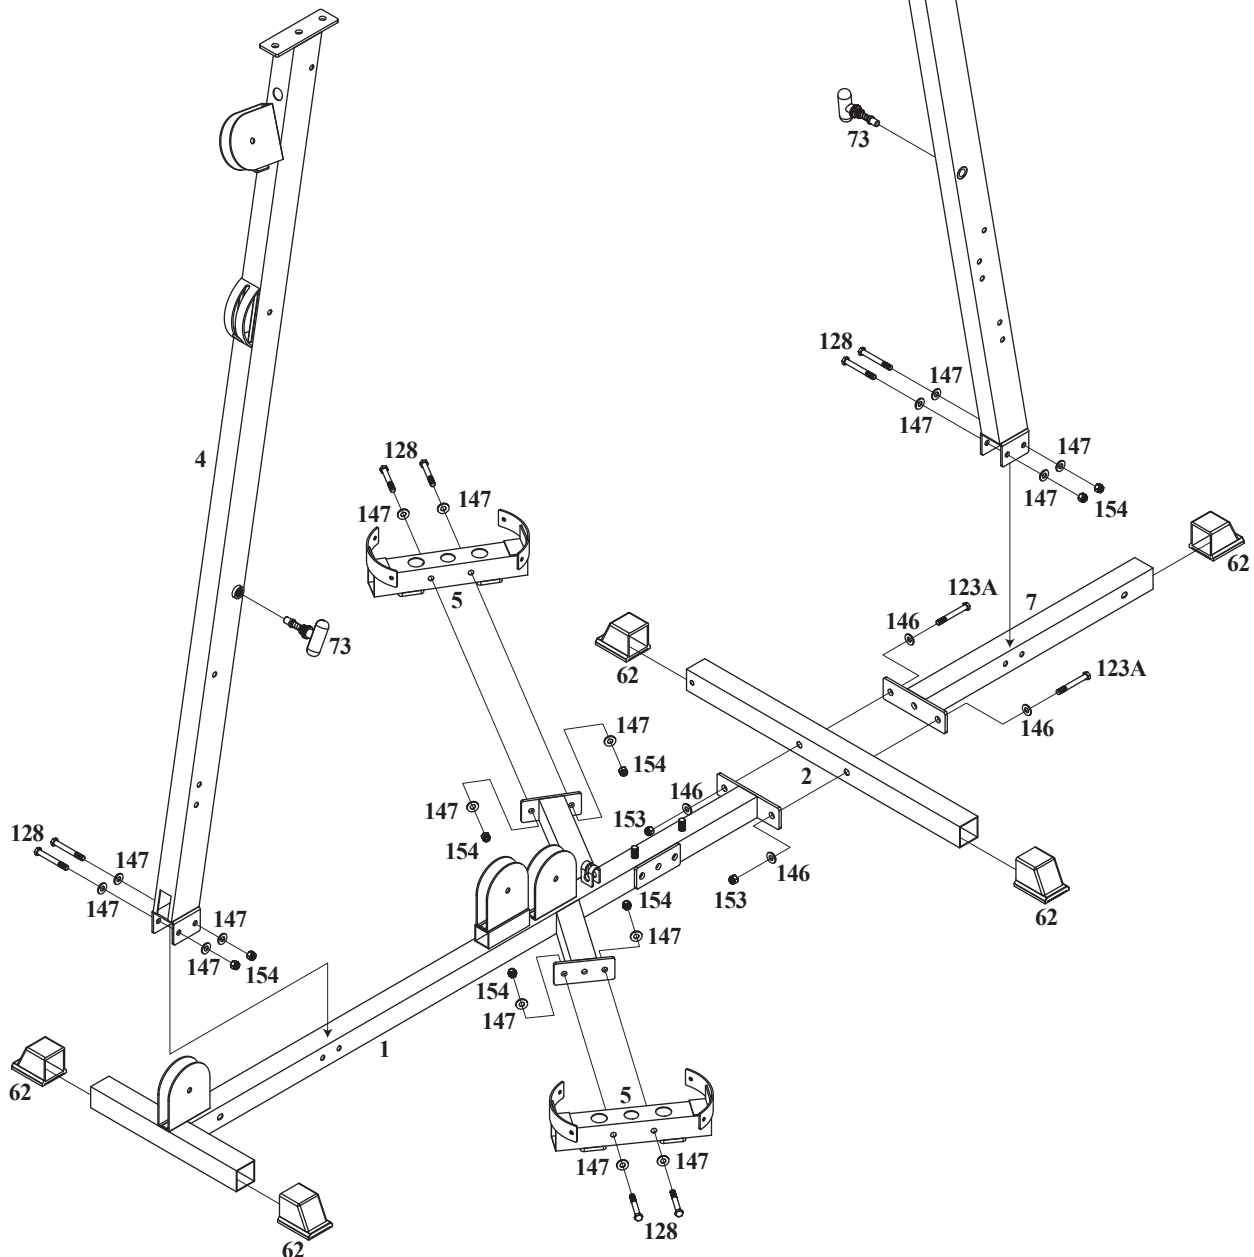


STEP 2 TOP FRAME ASSEMBLY

1. Attach Top Frame - bearing pre-installed (10) to Front & Rear Uprights (3 & 4) using two 1/2" X 4-1/4" Hex Bolts (122), four 1/2" Washers (146) and two 1/2" Nylon Nuts (153). Attach Lat Bar Holder (11) to Top Frame - bearing pre-installed (10) using two 3/8" X 3" Hex Bolts (128), four 3/8" Washers (147) and two 3/8" Nylon Nuts (154).
2. Attach four 50mm SQ. Plugs (64) and insert four Plastic Guide Rod Holders (72) to both Weight Stack Bases (5). Slide two Rubber Donuts (84) onto one end of each Guide Rod (13) and then insert Guide Rod (13) into the Plastic Guide Rod Holders (72) in Weight Stack Bases (5) as shown.
3. Slide each 10 LB Plate (96) over Guide Rods (13). Make certain that each plate is oriented with selector hole on bottom and facing forward. Attach Top Plate (95) to Selector Rod (94) using Top Plate Bolt (142). Slide Top Plate (95) and Selector Rod (94) over Guide Rods (13). Insert Plastic Guide Rod Holders (72) into both Top Guide Rod Retainers (6) and then slide both Top Guide Rod Retainers (6) over top of Guide Rods (13) and attach to Top Frame - bearing pre-installed (10), using two 3/8" X 3" Hex Head Bolts (128), four 3/8" Washers (147) and two 3/8" Nylon Nuts (154). Refer to drawing to be certain each Top Guide Rod Retainers (6) is on proper side.
4. Attach pre-assembled Cable Arm Assembly (27) to Cable arm Connector (8) using two 3/8" X 1" bolts (134) and two 3/8" Washes (147). Attach Cable Arm Connector (8) to Rear Upright (3), using two 3/8" X 3" Hex Head Bolts (128), four 3/8" Washers (147) and two 3/8" Nylon Nuts (154). Attach pre-assembled Cable Arm Assembly (27) to Base Frame (1) using two 1/2" Washers (146) and two 1/2" Nylon Nuts (153) onto pre-welded bolts on Base Frame (1). Remember to keep all bolts loose to ensure holes will align easily.
5. Slide the axle of each Cable Arm (28) through the hole in selector plate of Cable Arm Assembly (27) and fasten using Axle Collar (43) with 5/16" X 1/4" pre-inserted Set Screw (141).

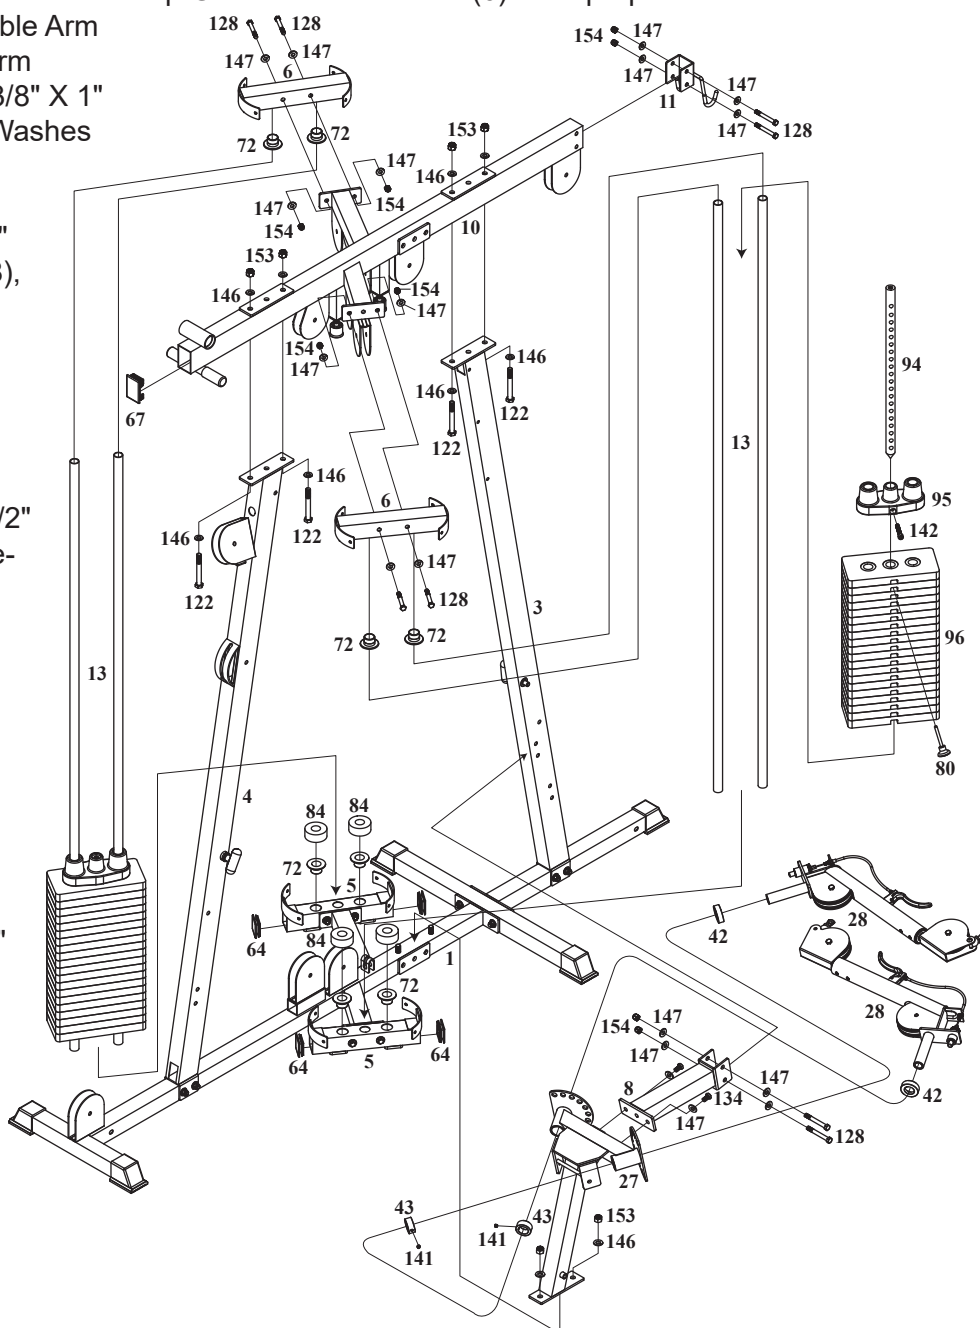


STEP 3 SEATS AND BACK PADS ASSEMBLY

1. Attach Front Seat Frame (14) to Front Upright (4) using two 3/8" X 3" Hex Head Bolts (128), four 3/8" Washers (147) and two 3/8" Nylon Nuts (154). Attach Front Seat Frame (14) to Base Frame (1) using one 3/8" X 4-3/4" Hex Head Bolt (126), two 3/8" Washers (147) and one 3/8" Nylon Nut (154).
2. Attach Leg Extension Arm with bearing pre-installed (19) to Front Seat Frame (14) by aligning holes and then inserting Leg Extension Axle (40). Fasten Leg Extension Axle (40) using two 5/16" Washers (148), two 5/16" Spring Washers (150) and two 5/16" X 5/8" Set Screws (137). Attach a 50mm S.Q. Plug (64) to top the bottom of Leg Extension Arm - bearing re-installed (19). Check to ensure that Leg Extension Arm - bearing pre-installed (19) pivots freely. Note: The L Pin (81) is used to lock the Leg Extension Arm - bearing pre-installed (19) into place. Attach the Right & Left leg extension arms (48R & 49L) to the Leg Extension Arm (19) by 5/16" X 1/2" Set Screw (165). Moisten the center of two Cover of Foam Pad (88) and slide onto each end of the Right & Left Leg Extension Arms (48R & 49L). Attach Plastic Washers (66) inside and Dome Washers (69) outside of Foam Pad (88) and secure the pads with 5/16" X 1-1/4" Sunken Head Screw (157).
3. Attach Hand Holder (9) to Front Chromed Seat Adjuster (18) using two 3/8" X 3" Hex Bolts (128), four 3/8" Washers (147) and two 3/8" Nuts (154). Attach Seat Pad (103) to Front Chrome Seat Adjuster (18) using two 3/8" Washers (147) and two 3/8" X 1-3/4" Bolts (133). Attach 25 X 50mm Rect. Plug (68) to rear of Front Chrome Seat Adjuster (18). Insert Front Chrome Seat Adjuster (18) into the Front Seat Frame (14) and lock into place with Locking Spring Knob (79).
4. Insert 1" Chrome Roller Tube (31) into hole in Front Chrome Seat Adjuster (18). Moisten Foam Pads (88) with water and slide onto each end of 1" Chrome Roller Tube (31). Attach Plastic Washer (66) to inside and Dome Washers (69) outside of Cover of Foam Pad (88) and secure the Pads using 5/16" X 1-1/4" Sunken Head Screw (157). A Rubber Mallet is useful. Lock 1" Chrome Roller Tube (31) into place with pre-installed set screw.
5. Attach Seat Back Adjuster (23) to Front Upright (4), using one 3/8" X 3" Hex Head Bolt (128) and one 3/8" Nylon Nut (154). It may be necessary to tighten this bolt, then loosen just enough to let Seat Back Adjuster (23) pivot freely. Shorter Pop Pin (73) should seat into adjustment holes in Seat Back Adjuster (23). Slide two Metal Hinges (24) to axle on top of Seat Back Adjuster (23), then attach Back Pad (102) to Metal Hinges (24) using four 3/8" Washers (147) and four 3/8" X 1" Bolts (134).
6. Attach Rear Seat Frame (20), Rear Chrome Seat Adjuster (21), Seat Back Adjuster (22) and pads using the same procedure as above for front seat. Insert 1" Chrome Roller Tube (31) into hole in Seat Back Adjuster (22). Moisten two Foam Pads (88) with water and slide onto each end of 1" Chrome Roller Tube (31). Attach Plastic Washers (66) to inside of Cover of Foam Pad (89) and secure the Pads with Plastic Cover (69) using 5/16" X 1-1/4" Sunken Head Screw (157). Lock into place with pre-installed Set Screw (141).

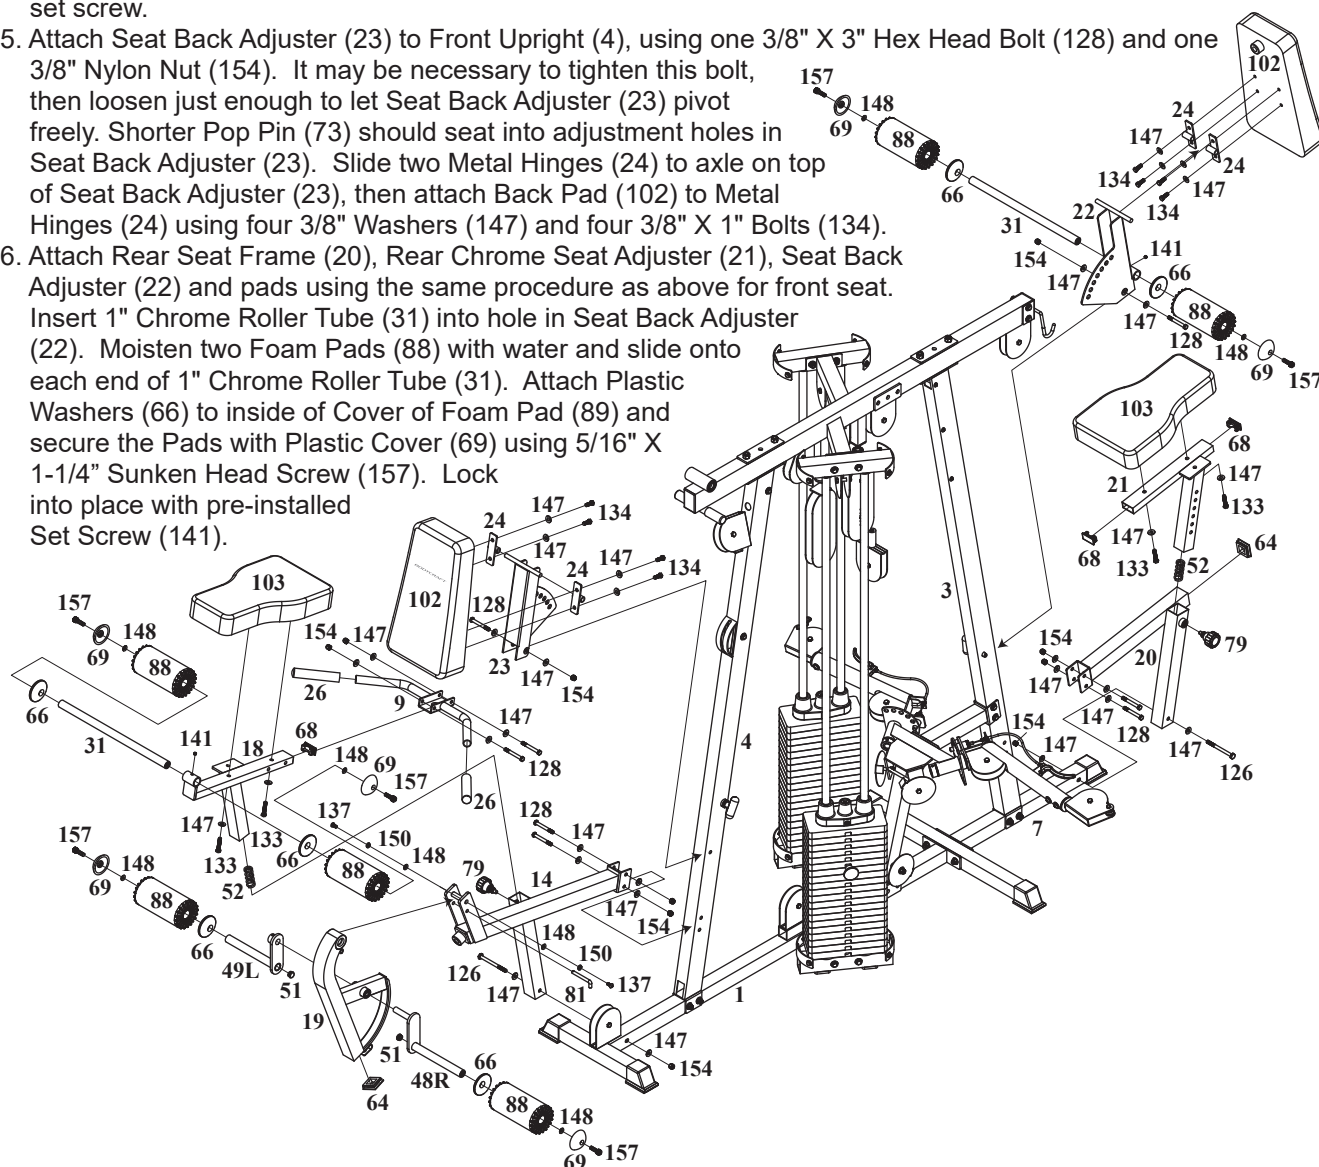


STEP 4 BENCH PRESS ASSEMBLY

1. Attach Press Arm Selector (12) to Top Frame - bearing pre-installed (10) by aligning holes and inserting 20mm Pivot Axle (33). Lock into place with pre-installed set screw.
2. Attach Press Arm (15) to Press Arm Selector (12) by aligning holes and inserting 25.4mm Axle (32). Lock into place with pre-installed set screw. Attach 50mm SQ. Plugs (64) onto top ends Press Arm Selector (12) and two Press Arm Plugs (50) onto ends of Press Arm (15).
3. Check Longer Pop Pin (77) into Press Arm Selector (12), making sure Pop Pin (77) seats into adjustment holes in Press Arm (15).

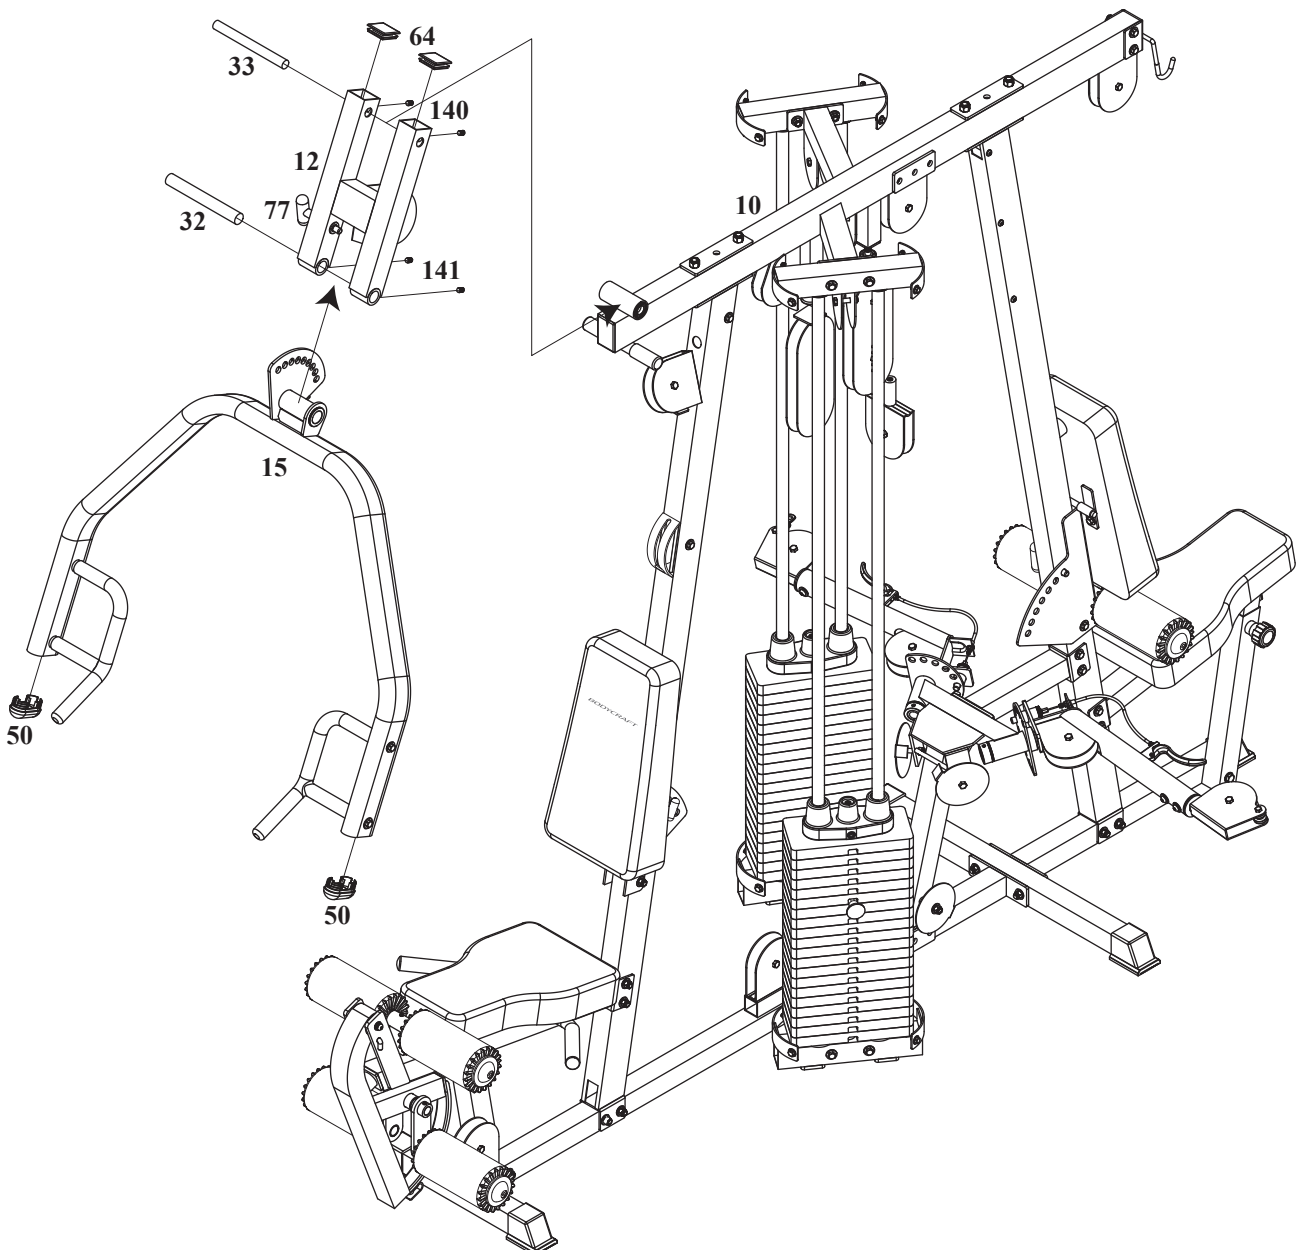









AB CRUNCH CABLE




REMOVABLE END

AB CRUNCH CABLE (108)

1. Removable End of AB Crunch Cable should be screwed into completely after the AB Crunch Cable installment.
2. Catch the steel cable end to the bracket welded on Leg Extension Arm (20) as shown Fig 1, start to run the threaded end of the AB Crunch Cable (108) through and under two pulleys mounted on the Base Frame (1) as Fig 2 and Fig 3, up and over the lower pulley in Adjustable Pulley Block (30) as shown in Fig 4, then down the cable under and over the pulley welded on Base Frame (1) as show Fig 5, route the cable up and over to the pulley in the Front Upright (4), as shown Fig 6.
3. Re-screw the ball end cable to the AB Crunch Cable.

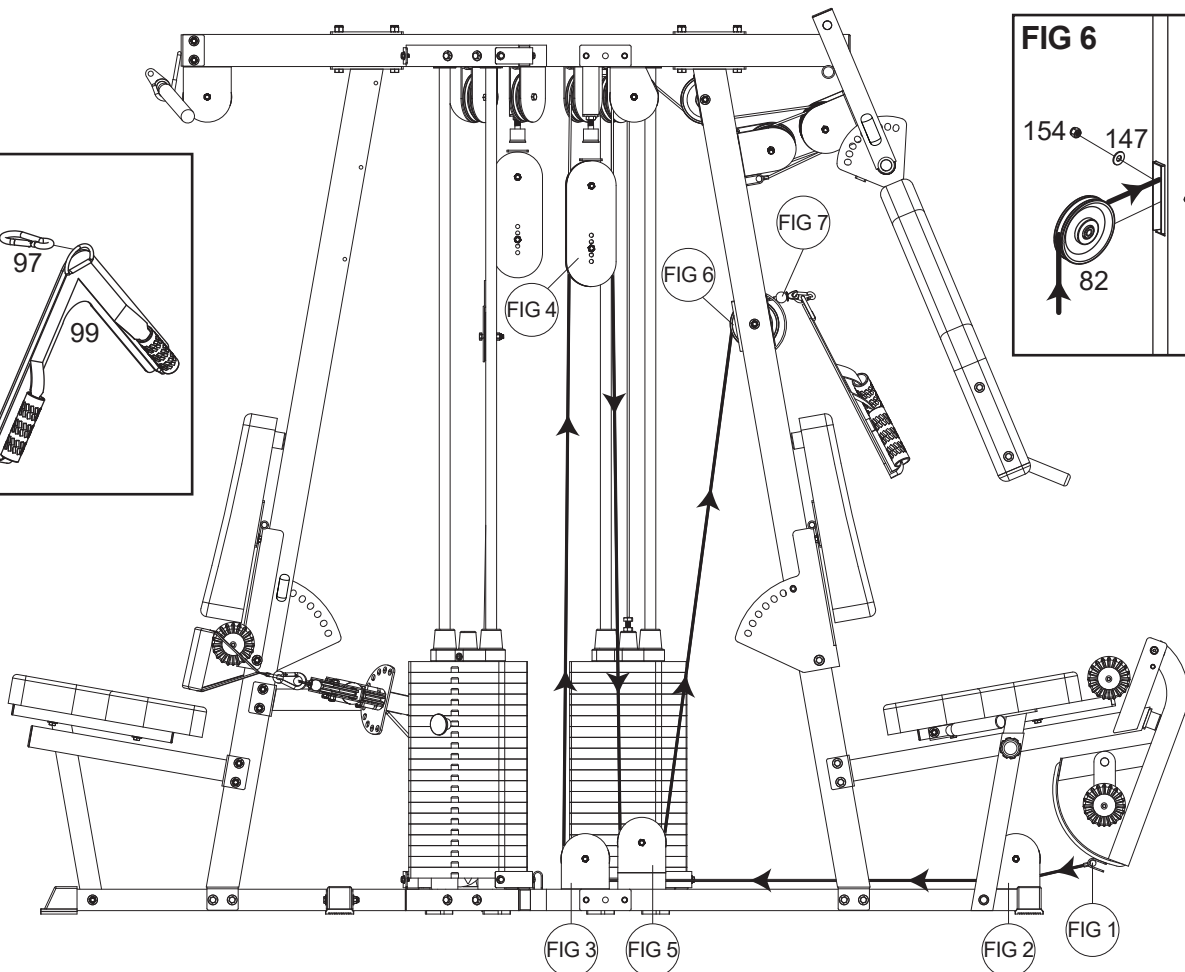





CABLE ARM CONNECTING CABLE



CABLE ARM CONNECTING CABLE (110)

Hook Cable Arm Connecting Cable (110) on bracket mounted on Base Frame (1) then route up and over low pulley in Adjustable Pulley Block (30) as shown in Fig. 3, then screw threaded cable end into Single Pulley Block (25).

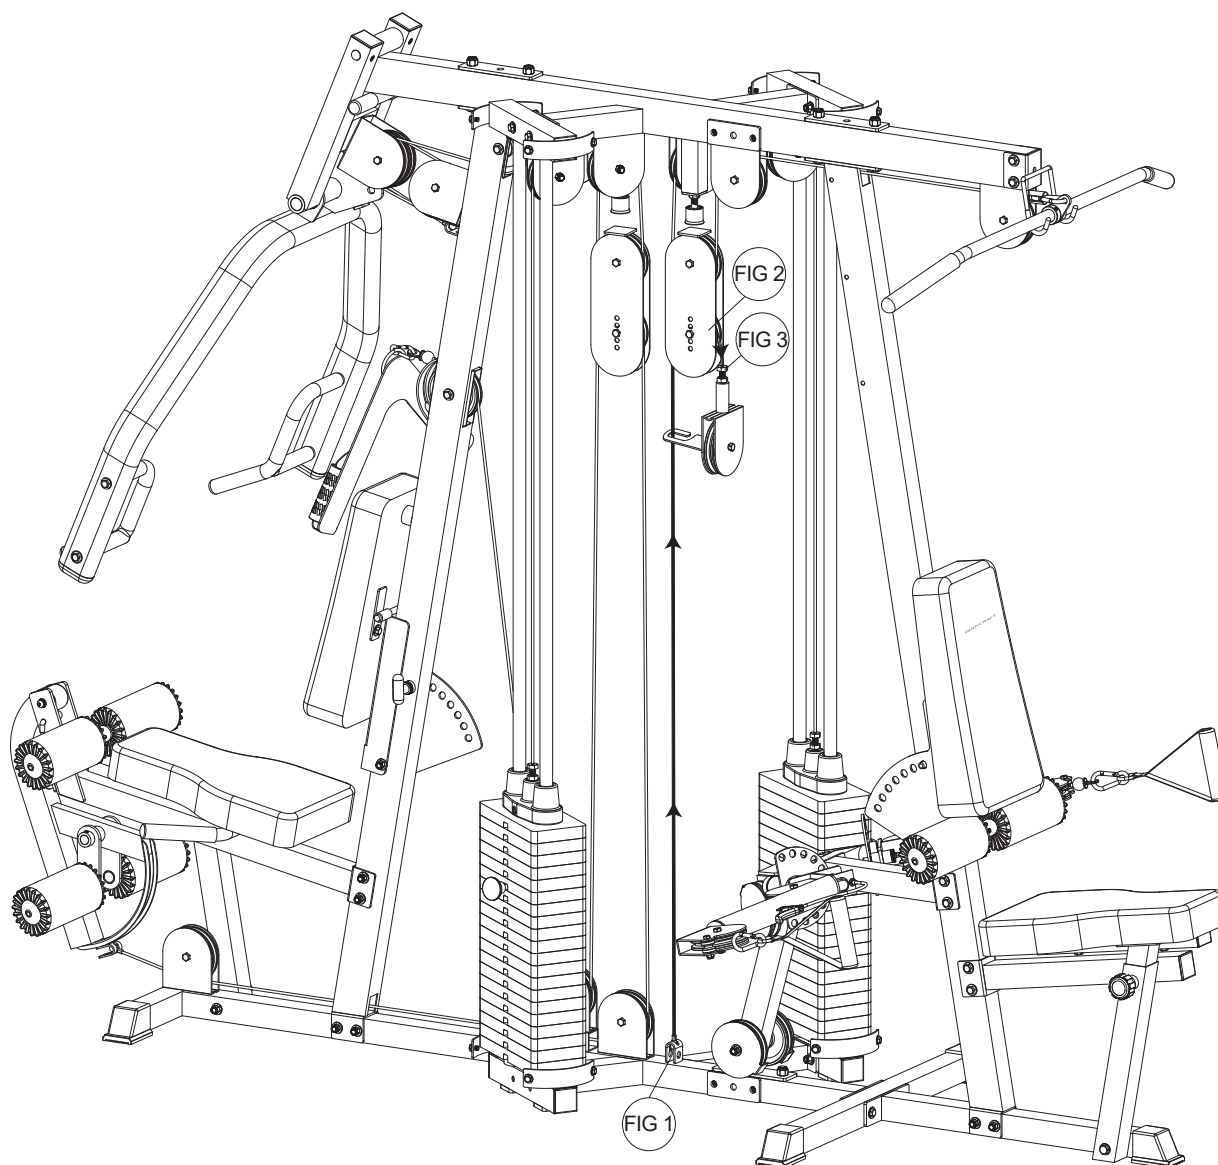


PRESS ARM CABLE



Assemble Cables and Pulley simultaneously.







Attach steel ball end of the Press Cable (107) to the bracket mounted on Front Upright (4) as shown Fig. 1. Route cable over and around left (as if sitting on seat) side pulley mounted in Press Arm Selector (12), under and around pulley mounted in Front Upright (4), over and around right side pulley in Press Arm Selector (12) as shown Fig. 2. Continue through (uppermost) slot and over pulley in Front Upright (4) as shown in Fig. 3, under top pulley in Adjustable Pulley Block (30), up and over pulley mounted on Top Frame (10), as shown in Fig. 4, down and around top pulley in Adjustable Pulley Block (30), up and over pulley mounted in Top Guide Rod Retainer (6), and down to weight stack. Screw Press Cable (107) end into Selector Rod (94) at least 7 threads as shown in Fig. 8.

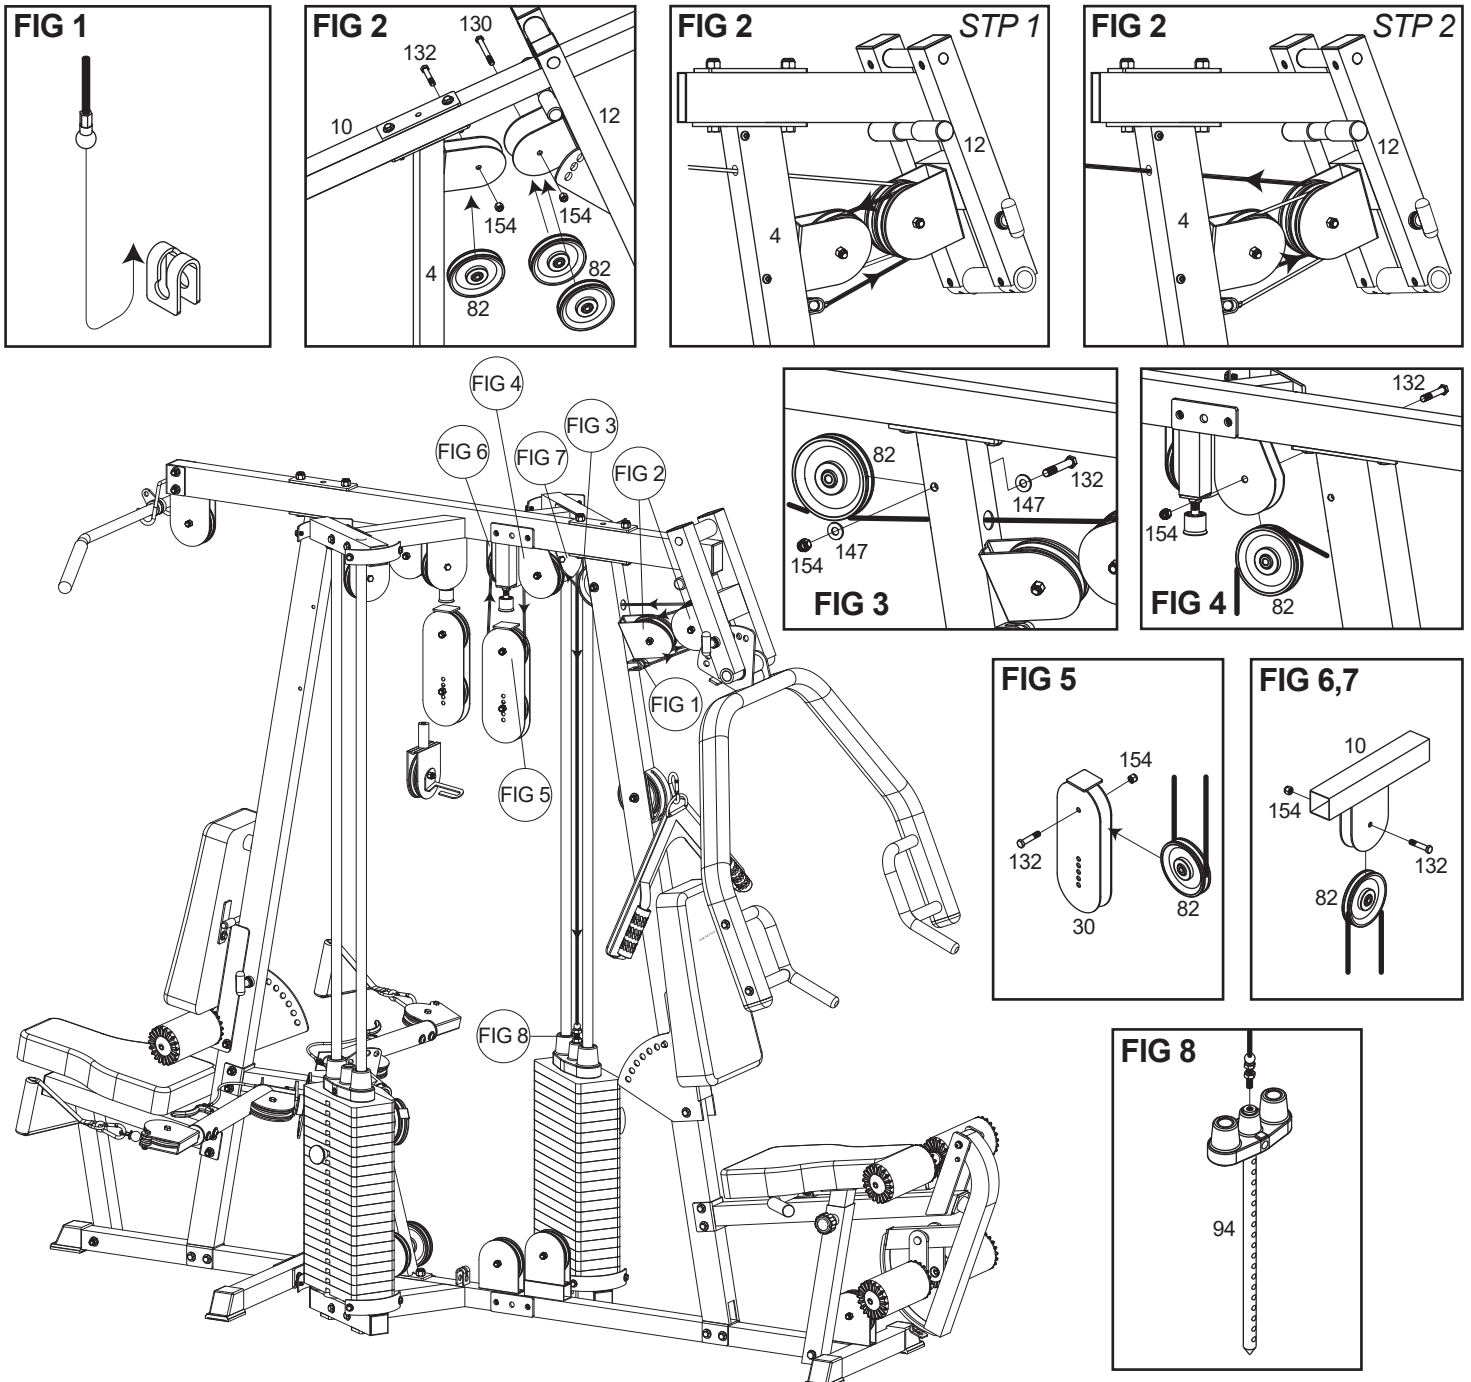


TOP CABLE



Route threaded end of Top Cable (109) over pulley mounted to Top Frame (10) as shown in Fig. 1, through slot in Rear Upright (3), over pulley in Top Frame (10), under and around top pulley in Pulley Block (30), as shown in Fig. 3 up and over pulley mounted on Top Guide Rod Retainer (6), as shown in Fig. 5, and down to weight stack. Screw cable end into Selector Rod (94) at least 7 threads as shown in Fig. 6.

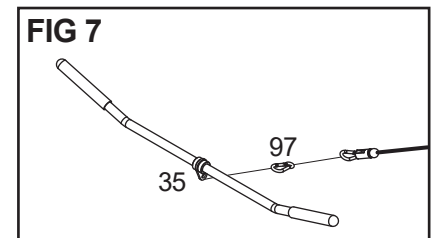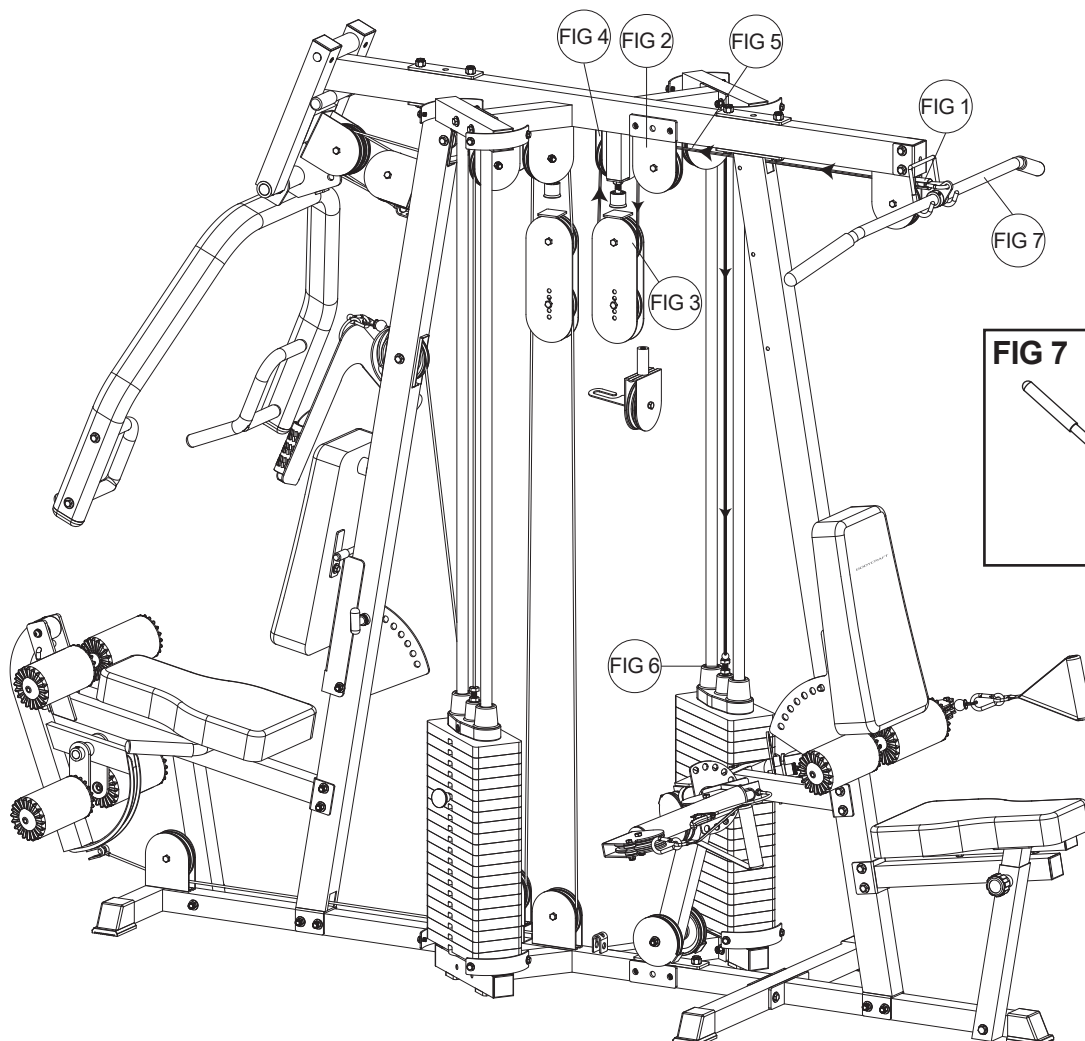

CABLE ARM CABLE



CABLE ARM CABLE (111)

Attach Cable Arm Cable (111) on the pulley of Single Pulley Block (25) as shown Fig. 5

Attach pulleys and Pulley Guide Brackets (26) to Cable Arm Assembly (27) as shown in Fig. 3 and Fig. 4. Be certain that, when tightened, the pulley guide brackets do not interfere with cable movement. Route Cable Arm Cable (111) around these pulleys as shown, up and around pulley in the Single Pulley Block (25).

Make sure Cable Guide Plate (171) attached on Single Pulley Block (25) to be guided at Connecting Cable (110).

FIG 2,8

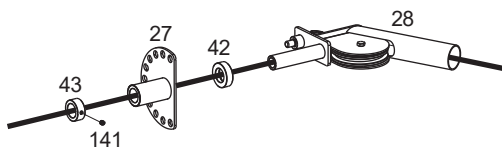


FIG 3,7




FIG 4,6

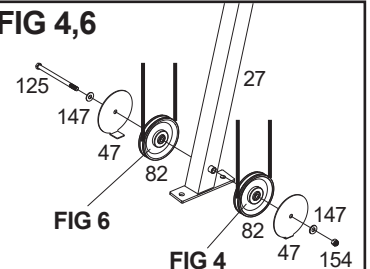


FIG 1,9




FIG 5







FIG 10

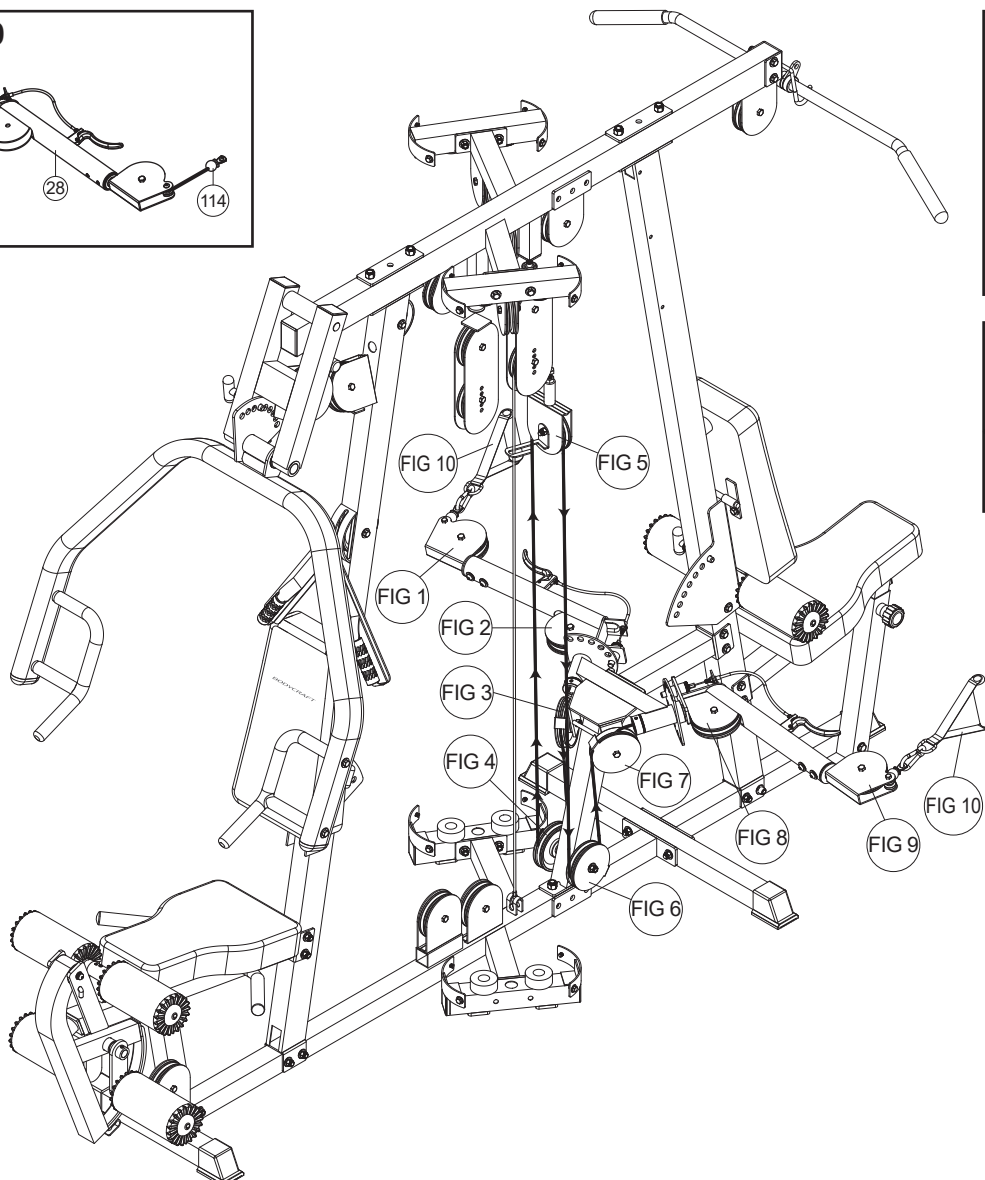


LEG PRESS WEIGHT BASE ASSEMBLY

1. Attach two 50mm SQ. Plugs (64) to Weight Base Connector (207). Attach Weight Base Connector (207) to Base Frame (1), using two 1/2" X 1-1/4" Hex Threaded Bolt (169) and two 1/2" Washers (146).
2. Attach Long Leg Press Connector (205) to Base Frame (1), using two 3/8" X 3" Hex Bolts (128), four 3/8" Washers (147) and two 3/8" Nuts (154).
3. Insert two Plastic Guide Rod Holders (72) into Weight Base Connector (207). Slide two Rubber Donuts (84) onto one end of each Guide Rod (13), then insert Guide Rod (13) into the Plastic Guide Holders (72) in the Weight Base Connector (207).
4. Slide each 10 LB Plate (96) over Guide Rod (13). Make certain that each plate is oriented with selector hole on bottom and facing forward. Attach Top Plate (95) to Selector Rod (94) using Top Plate Bolt (142). Slide Top Plate (95) and Selector Rod (94) over Guide Rods (13). Insert Plastic Guide Rod Holder (72) into Top Guide Rod Retainer (302), and then slide Weight Stack Base (208) over top of Guide Rods (13).
5. Attach Weight Stack Base (208) to Top Frame (10), using two 1/2" X 1-1/4" Hex Thread Bolt (169) and two 1/2" Washers (146).

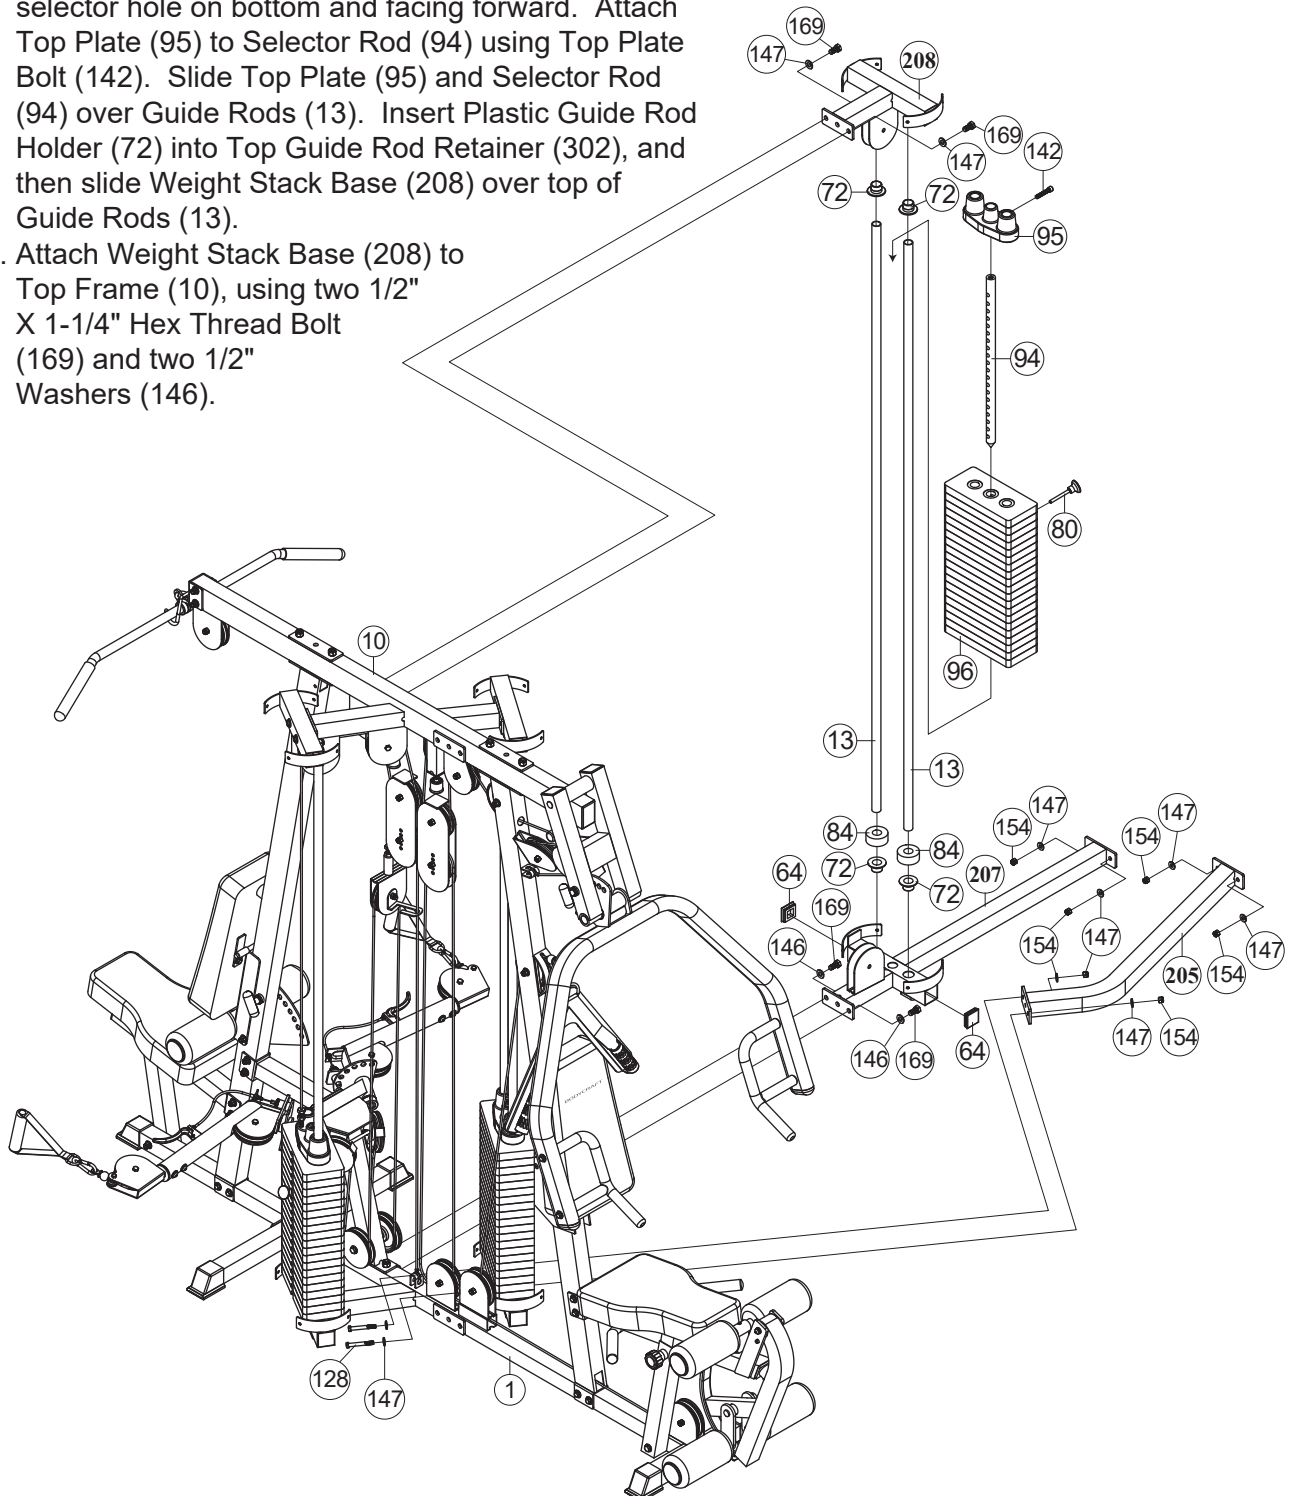

LEG PRESS SYSTEM ASSEMBLY

- Tighten all the bolts and nuts gradually, from ground - up.***









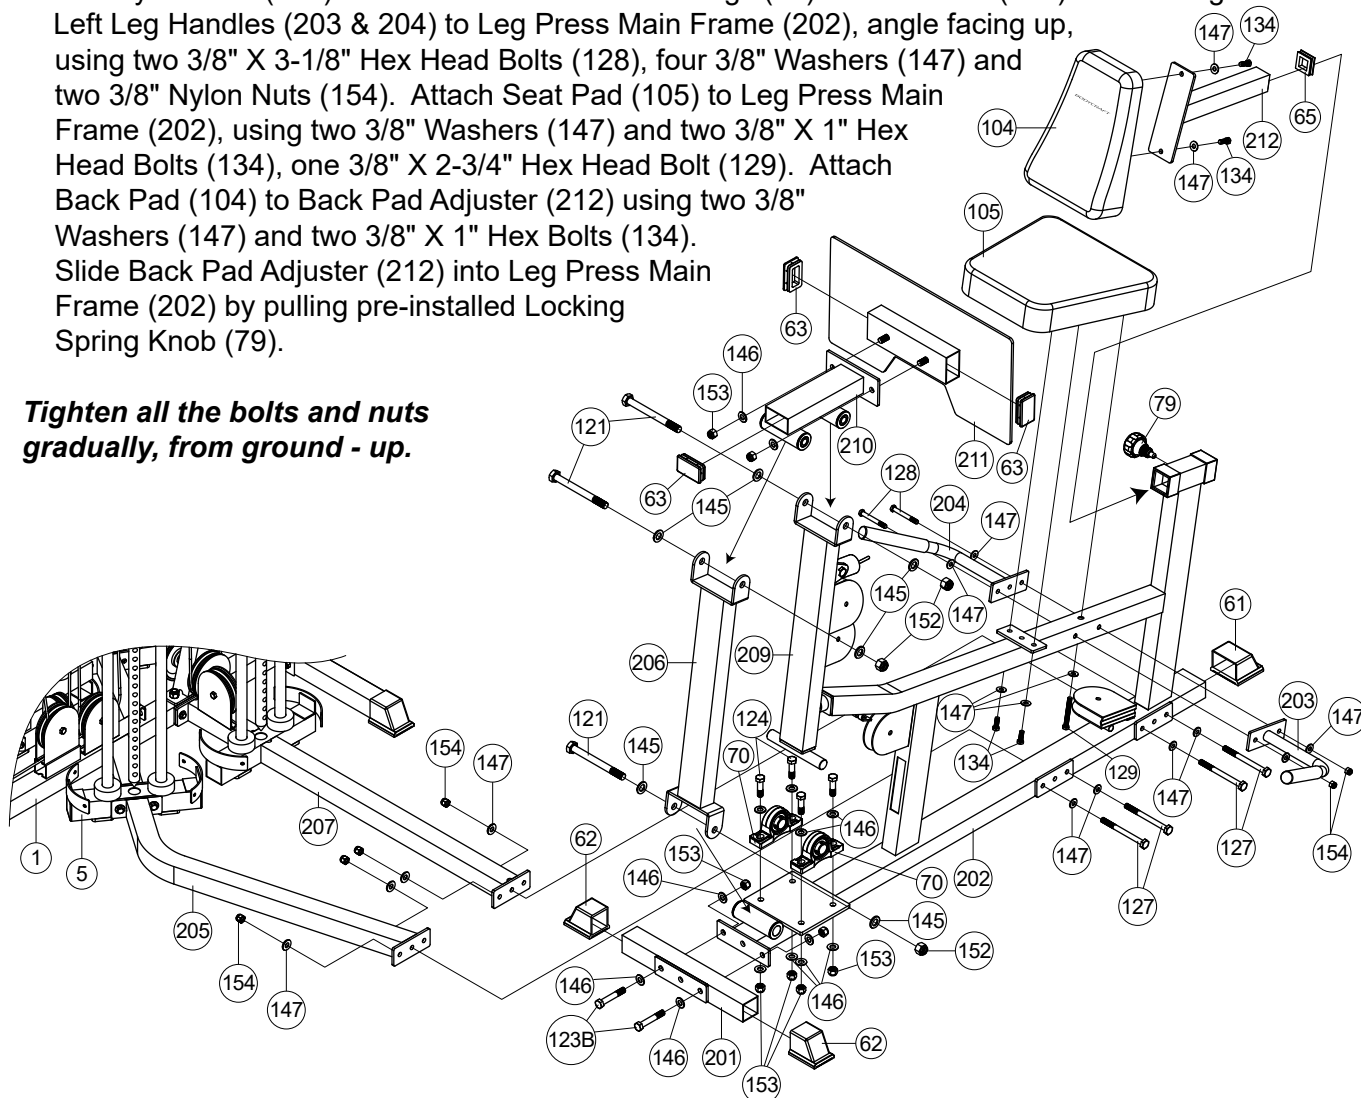


LEG PRESS CABLE ASSEMBLY




Screw threaded end of Leg Press Cable (213) into the top of Selector Rod (94) at least 7 threads. Route cable up and over the pulley on Top Guide Rod Retainer (208) as shown Fig 2. then down and under the pulley on Weight Stack Base (207) as shown in Fig. 3. Then route cable under Weight Stack Base (207) and around horizontal pulley on Leg Press Main Frame (202). Route cable under and around lowest pulley mounted on Rear Leg Press Support (209), under and around right side (as if sitting on seat) pulley on Leg Press Main Frame (202), over and around top pulley on Rear Leg Press Support (209), under and around left side pulley on Leg Press Main Frame (202) as shown in Fig. 6. Then hook the ball end of the cable into the receptor mounted on Rear Leg Press Support (209) as shown in Fig. 8.

Hint : When viewed from the side, the Leg Press Cable should be a series of " loops". There should not be any " X's "

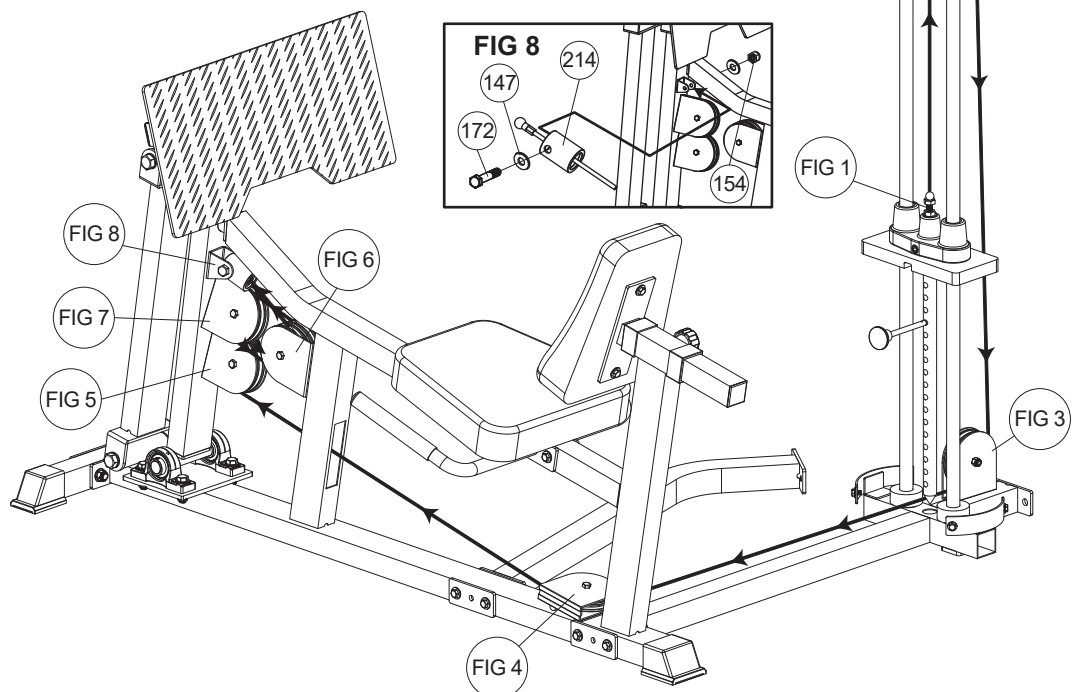

CABLE COLUMN BASE FRAME ASSEMBLY

1. Attach three 50mm SQ. Plugs (64) to Cable Column Weight Stack Base (301). Attach Cable Column Weight Stack Base (301) to Base Frame (1), using two 1/2" X 1-1/4" Hex Threaded Bolt (169) and two 1/2" Washers (146).
2. Attach Front Stabilizer (303) to Weight Stack Base (301), using two 3/8" X 3-1/2" Hex Bolts (318), four 3/8" Washers (147) and two 3/8" Nuts (154). Attach two 50 X 75mm Rect. Plugs (67) onto both ends of Front Stabilizer (303).
3. Insert two Plastic Guide Rod Holders (72) into Weight Stack Base (301). Slide two Rubber Donuts (84) onto one end of each Guide Rod (13), then insert Guide Rod (13) into the Plastic Guide Holders (72) in the Weight Stack Base (301).
4. Slide each 10 LB Plate (96) over Guide Rod (13). Make certain that each plate is oriented with selector hole on bottom and facing forward. Attach Top Plate (95) to Selector Rod (94) using Top Plate Bolt (142). Slide Top Plate (95) and Selector Rod (94) over Guide Rods (13). Insert Plastic Guide Rod Holder (72) into Top Guide Rod Retainer (302), and then slide Top Guide Rod Retainer (302) over top of Guide Rods (13).
5. Attach Top Guide Rod Retainer (302) to Top Frame (10), using two 1/2" X 1-1/4" Hex Thread Bolt (169) and two 1/2" Washers (146).
6. Attach two Caps (86) and two 50 X 100mm Pulley Housing Covers (320) to Cable Height Adjuster (304). Slide Cable Height Adjuster (304) onto Chromed Upright (306) and then insert the Hand Holder (307) into the top of Chromed Upright (306) as shown. Attach to Guide Rod Retainer (302), using two 3/8" X 3" Hex Bolts (128), four 3/8" Washers (147) and two 3/8" Nylon Nuts (154).

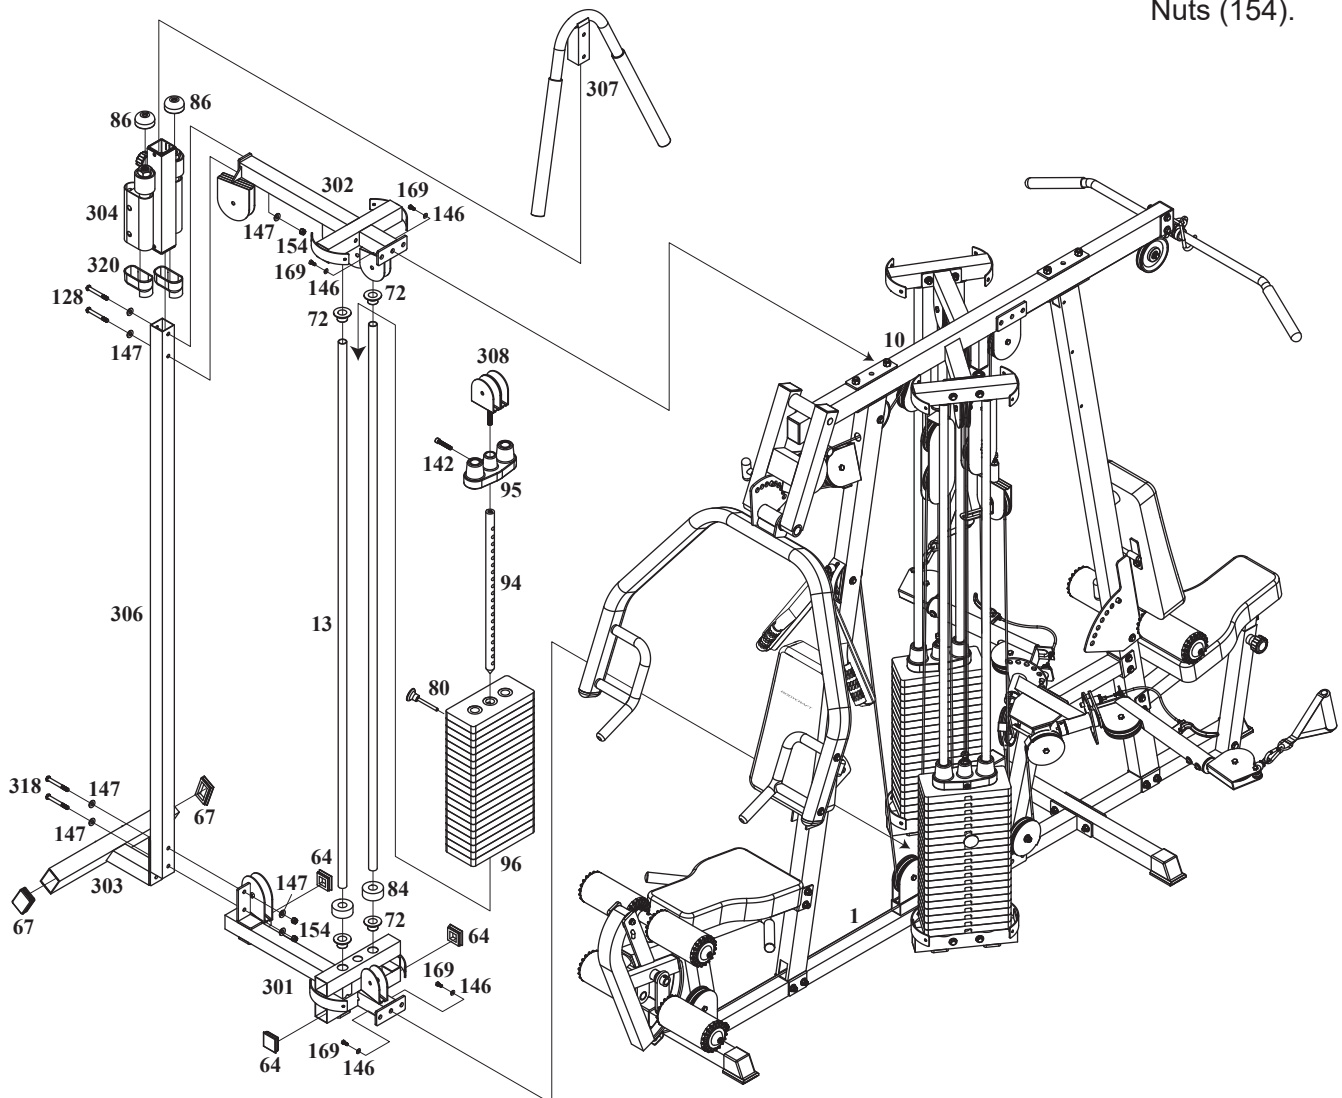

CABLE COLUMN CABLE












CABLE COLUMN CABLE (314)



REMOVABLE END (314A)


1. Screw the Double Pulley Bracket (308) into the Top Plate with Selector Rod (94) 10 threads (2cm).
2. Insert the ball end of the Cable Column Cable (314) into the front of the right side Cable Height Adjuster (304) and out of the top. Then attach two pulleys as shown in Fig 1. Route cable up to Top Guide Rod Retainer (302) and over pulley mounted as shown in Fig 2.
3. Continue along Top Guide Rod Retainer (302) to next pulley as shown in Fig 3. Then down to left side pulley in Double Pulley Bracket (308) as shown in Fig 4 [STEP1], up to rear side of next pulley in Top Guide Rod Retainer (302) {exiting toward front}. Then continue routing down to front of right side pulley in Double Pulley Bracket (308) {exiting toward rear}, then up to front of last pulley in Top Guide Rod Retainer (302) as shown in Fig 4 [STEP2].
4. Route cable over last pulley in top, exiting toward rear, continue down to pulley mounted behind Weight Stack Base (301B) as shown in Fig 7, under Weight Stack, and around pulley at base next to column. Finally, route cable up to left side of Cable Height Adjuster (304) and mount pulleys as shown in Fig 1. Attach removable end to the bolt end of the cable.

IMPORTANT: Cable length can be adjusted by removing the Bolt on the Top Plate (95) to turn the Selector Rod (94) to remove slack or further down to gain length.

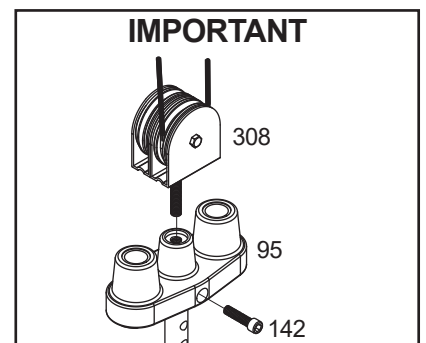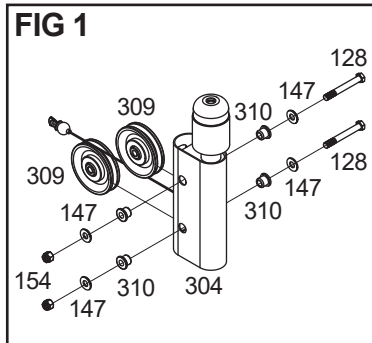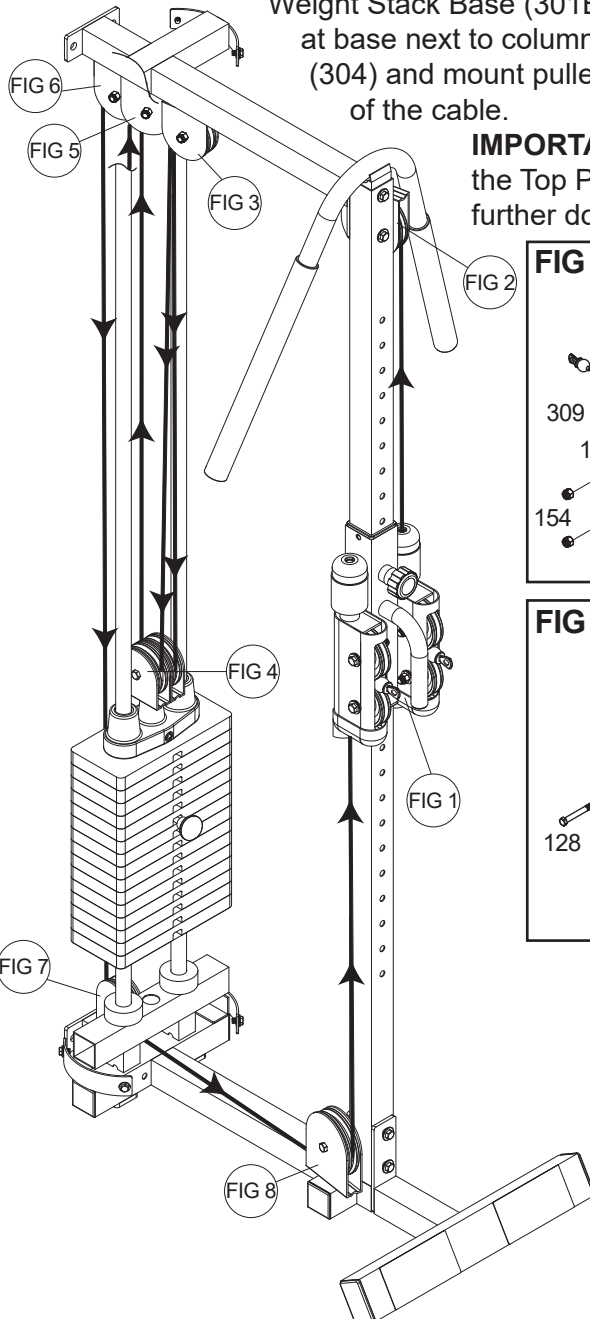


ASSEMBLE WEIGHT STACK SHROUDS AND POSTER PLATES

1. Attach Weight Stack Shrouds (35) to Weight Stack Bases (5 & 6) and Tops using 5/16" Washers (148) and 5/16" X 1/2" Hex Head Bolts (135). Remember to keep all bolts loose in frame to ensure holes line up easily.
2. Attach Right & Left Poster Plates (38R & 39L) to Rear & Front Uprights (3 & 4) using 8 X 53mm Female Bolts (143) and 6 X 12mm Male Nuts (144).
3. Trim two Trims for Weight Shroud (106) on Weight Stack Shroud (35).

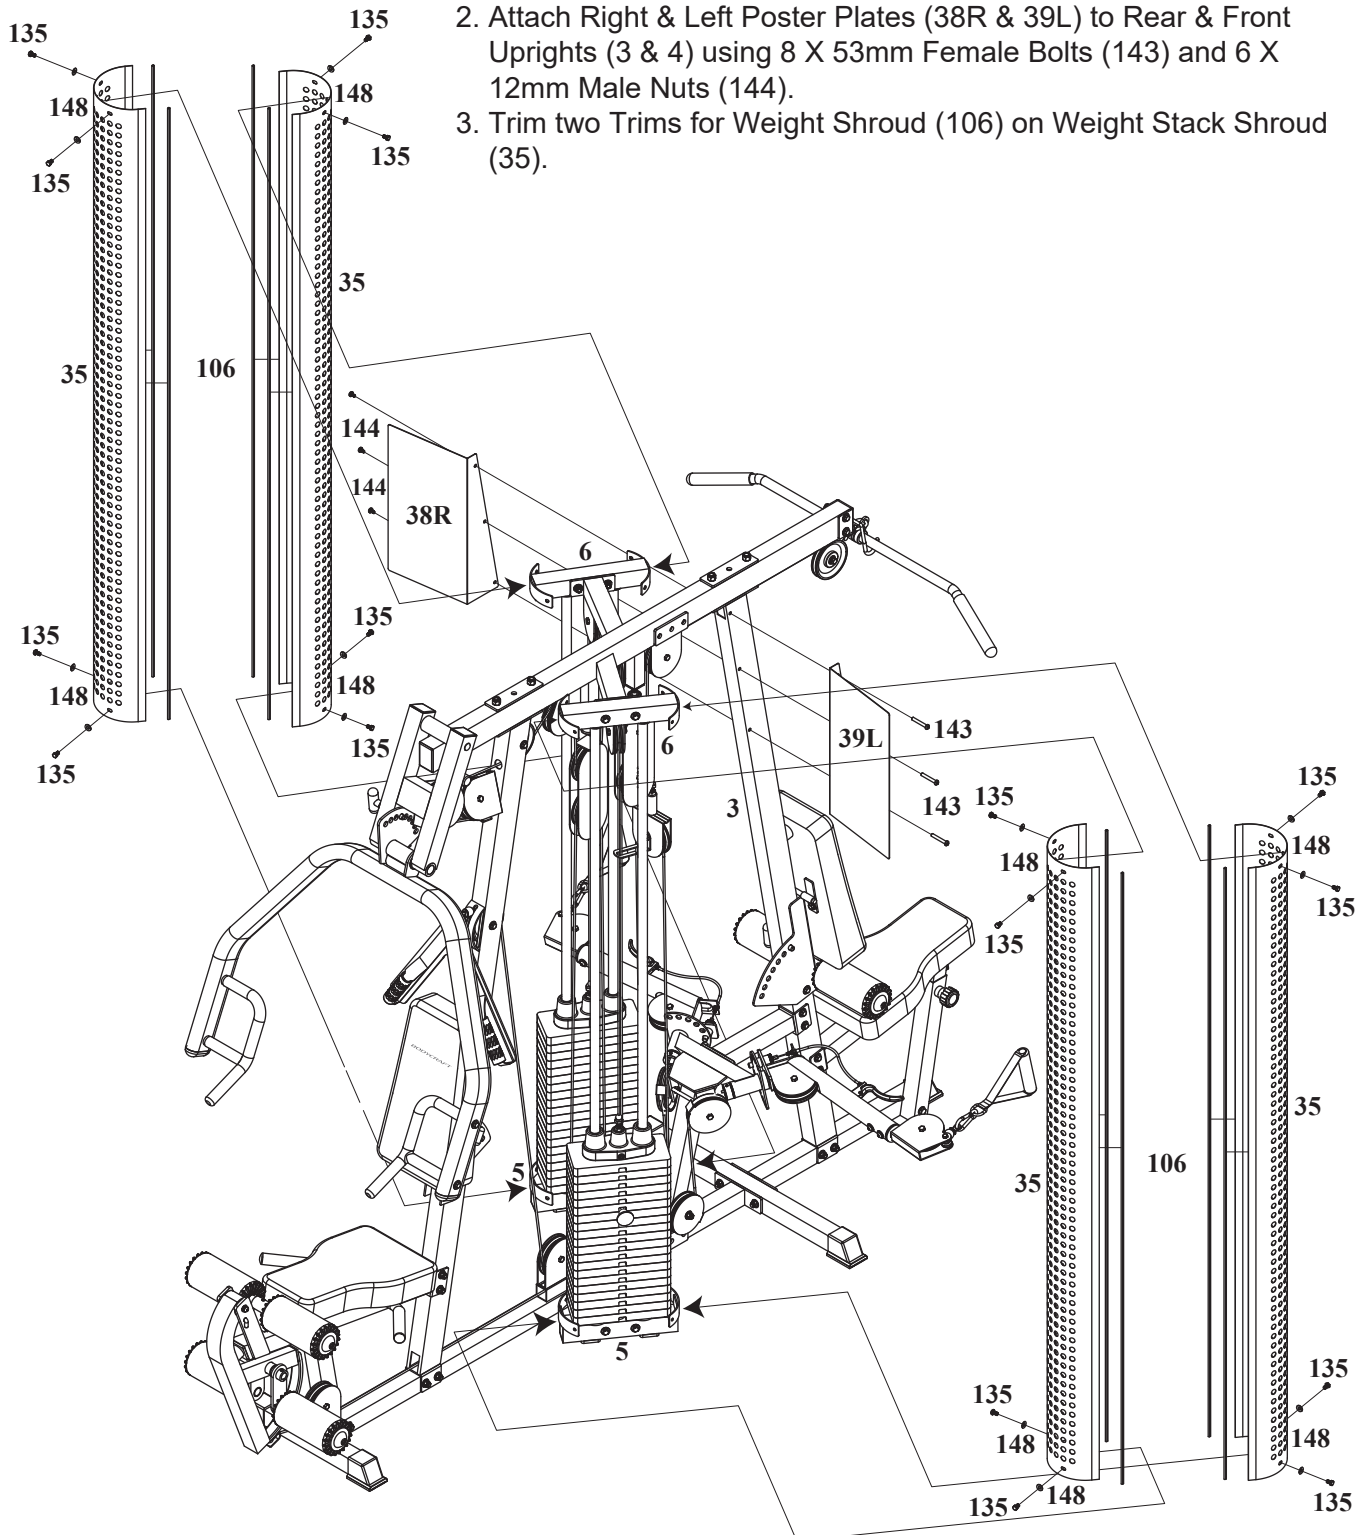


LEG PRESS SHROUD ASSEMBLY

1. Attach Weight Stack Shrouds (35) to Weight Base Connector (207) and Weight Stack Base (208) and Tops using 5/16" Washers (148) and 5/16" X 1/2" Hex Head Bolts (135). Remember to keep all bolts loose in frame to ensure holes line up easily.
2. Trim two Trims for Weight Shroud (106) on Weight Stack Shroud (35).

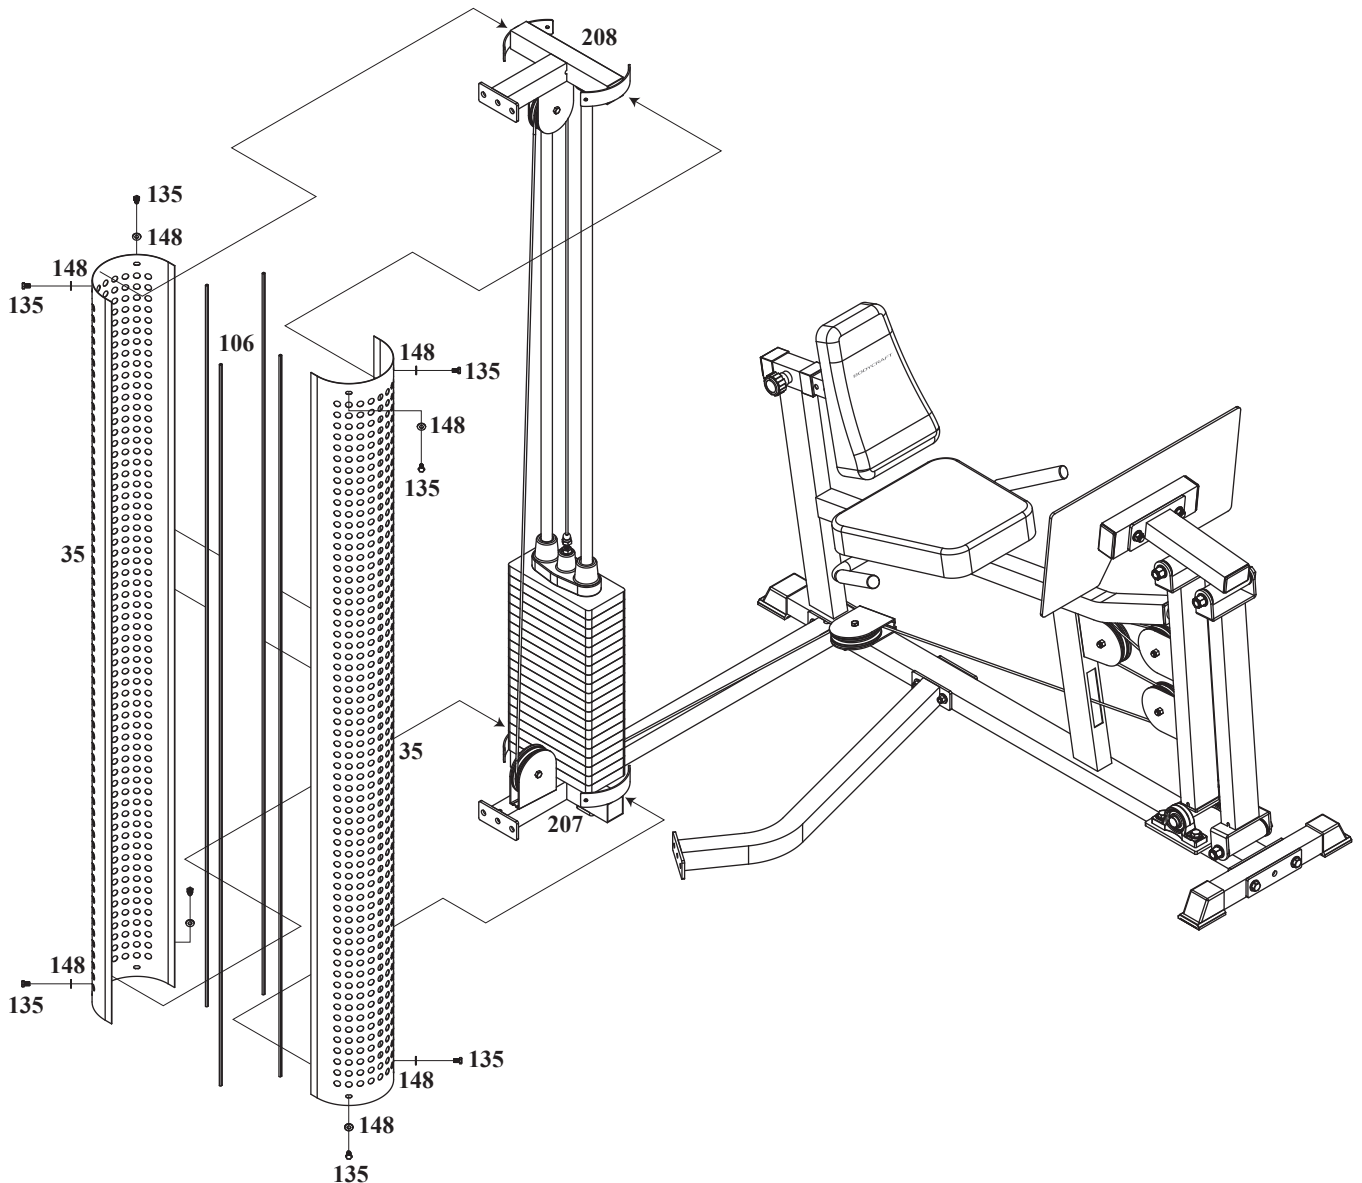


CABLE COLUMN WEIGHT STACK SHROUD ASSEMBLY

1. Attach Weight Stack Shrouds (35) to Top Guide Rod Retainer (302) and Weight Stack Base (301B) and Tops using 5/16" Washers (148) and 5/16" X 1/2" Hex Head Bolts (135). Remember to keep all bolts loose in frame to ensure holes line up easily.
2. Trim two Trims for Weight Shroud (106) on Weight Stack Shroud (35).

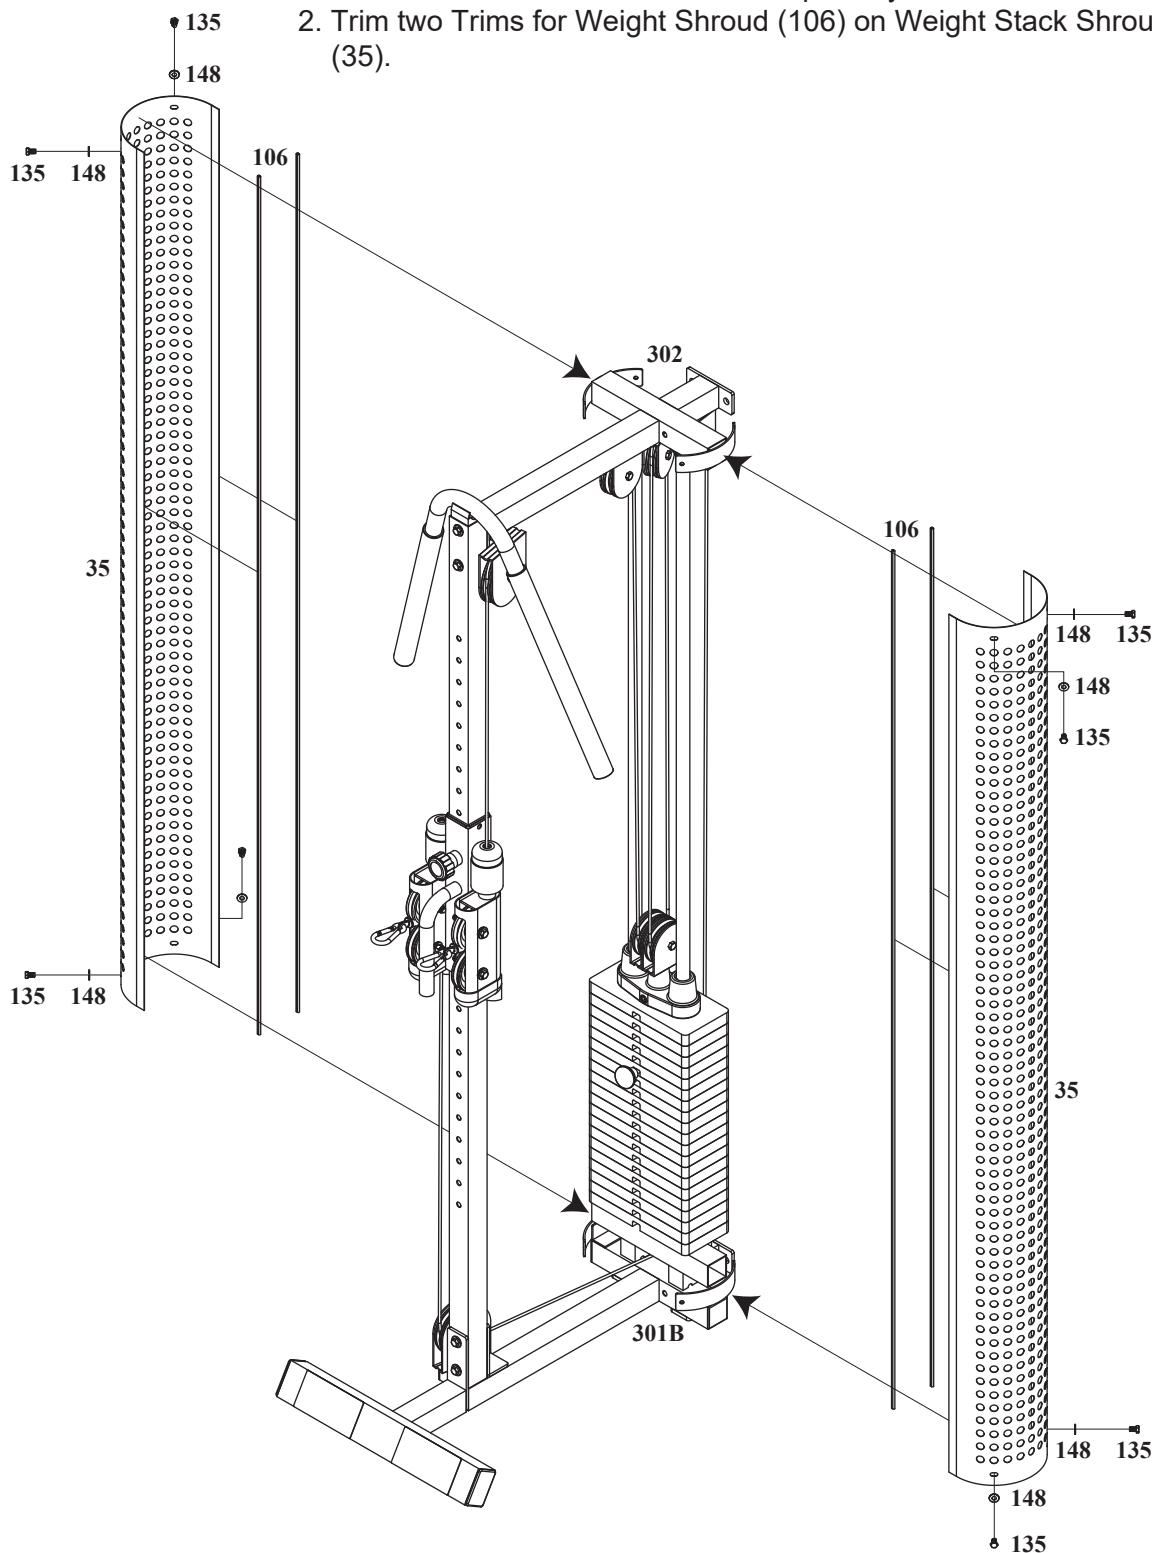

COMPLETE PARTS CHART

NO.	DESCRIPTION	QTY.
1	BASE FRAME	1
2	BASE STABILIZER	1
3	REAR CABLE ARM UPRIGHT	1
4	FRONT PRESS ARM UPRIGHT	1
5	WEIGHT STACK BASE	2
6	TOP GUIDE ROD RETAINER	2
7	FRONT STABILIZER	1
8	CABLE ARM CONNECTOR	1
9	HAND HOLDER	1
10	TOP FRAME	1
11	LAT BAR HOLDER	1
12	PRESS ARM SELECTOR	1
13	GUIDE ROD	4
14	FRONT SEAT FRAME	1
15	PRESS ARM	1
16R	RIGHT HANDLE OF PRESS ARM	1
17L	LEFT HANDLE OF PRESS ARM	1
18	FRONT CHROME SEAT ADJUSTER	1
19	LEG EXTENSION ARM	1
20	REAR SEAT FRAME	1
21	REAR CHROME SEAT ADJUSTER	1
22	SEAT BACK ADJUSTER	1
23	SEAT BACK ADJUSTER	1
24	METAL HINGE FOR SEAT BACK ADJUSTER	4
25	SINGLE PULLEY BLOCK	1
26	SLEEVE	2
27	CABLE ARM ASSEMBLY	1
28	CABLE ARM	2
29	SWIVEL CABLE ARM TOP	2
30	ADJUSTABLE PULLEY BLOCK	2
31	1" CHROME ROLLER TUBE	2
32	25.4mm PIVOT AXLE	1
33	20mm PIVOT AXLE	1
34	CABLE ARM COLLAR	2
35	WEIGHT STACK SHROUD	4
36	LAT BAR	1
37	LOW ROW BAR	1
38R	RIGHT POSTER PLATE	1
39L	LEFT POSTER PLATE	1
40	LEG EXTENSION AXLE	1
41	608ZB BEARING	4
42	STEEL SPACER	2
43	AXLE COLLAR	2
44	BEARING BASIN	4
45	BEARING	4
46	BEARING COVER	4
47	PULLEY GUIDE BRACKET	4
48R	RIGHT LEG EXTENSION ARM	1
49L	LEFT LEG EXTENSION ARM	1
50	40 X 80mm PRESS ARM PLUG	2
51	1" PLUG	2
52	SEAT SPRING	2
53	3/4" BUSHING	2
55	37mm OD. BEARING	2

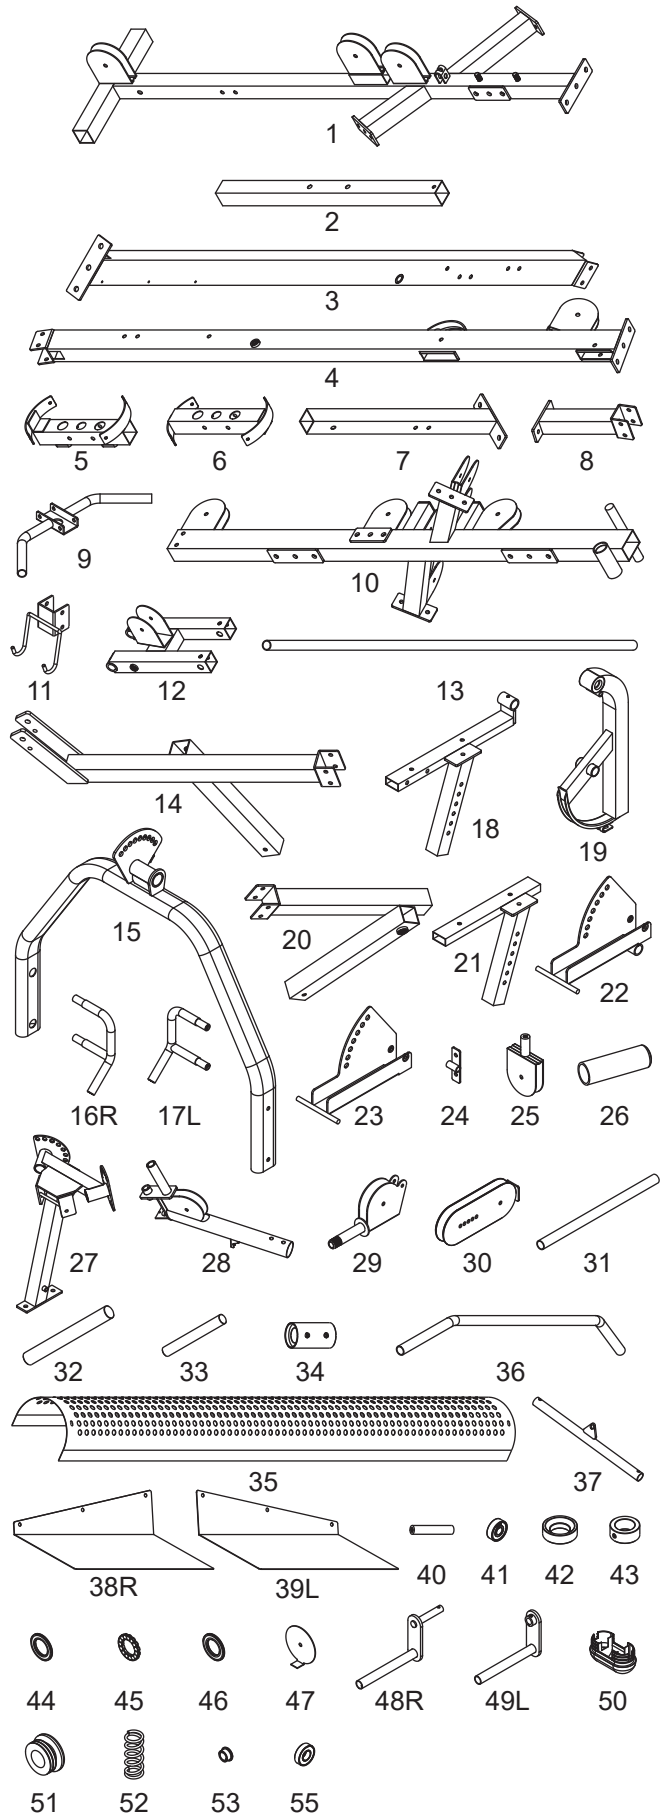


*Parts images are not to scale.

COMPLETE PARTS CHART



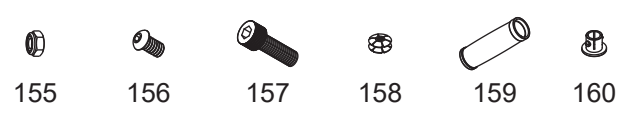
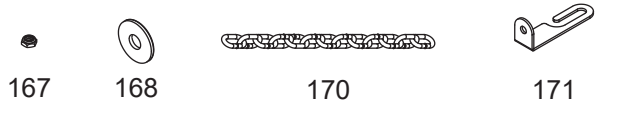
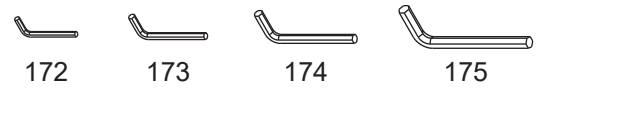
NO. DESCRIPTION QTY.

62	50mm SQ. CAP	5
64	50mm SQ. PLUG	8
66	PLASTIC WASHER	6
67	50 X 75mm RECT. PLUG	1
68	25 X 50mm RECT. PLUG	3
69	PLASTIC COVER	6
72	PLASTIC GUIDE ROD HOLDER	8
73	SHORTER POP PIN	2
74	28.6mm STEEL BUSHING	4
75	25.4mm STEEL BUSHING	2
76	1/2" X 1-1/8" BEARING	2
77	LONGER POP PIN	1
78	CLUTCH LEVER OF CABLE ARM	2
79	SPRING KNOB	2
80	SELECTOR PIN	2
81	L PIN	1
82	114mm PULLEY	28
83	SMALL PULLEY IN SWIVEL ARM	2
84	RUBBER DONUT	4
85	ADJUSTABLE STOPPER	2
87	STOPPER	3
88	FOAM PAD	6
89	COVER OF FOAM PAD	6
90	1" X 200mm HAND GRIP	2
91	1" X 140mm HAND GRIP	2
92	1" X 70mm PRESS ARM STOPPER	2
93	LAT BAR HOLDER COVER	2
94	SELECTOR ROD	2
95	TOP PLATE	2
96	10 LB. PLATE	38
97	SNAP HOOK	4
99	AB CRUNCH STRAP	1
100	SINGLE HANDLE	2
102	BACK PAD	2
103	SEAT PAD	2
106	TRIM FOR WEIGHT SHROUD	8
107	PRESS ARM CABLE	1
108	AB CRUNCH CABLE	1
109	TOP CABLE	1
110	CABLE ARM CONNECTING CABLE	1
111	CABLE ARM CABLE	1
112	REMOVABLE END CABLE ARM CABLE	1
113	CLUTCH CABLE	2

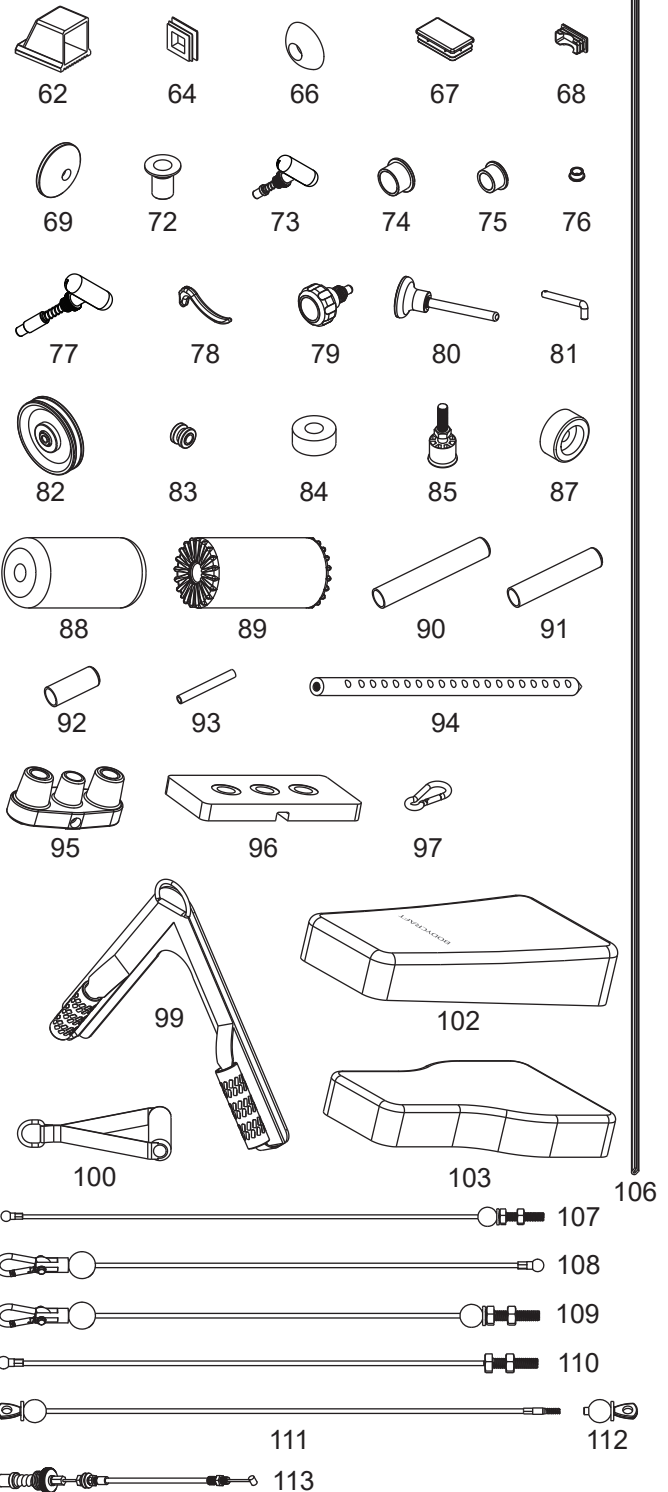

*Parts images are not to scale.

COMPLETE PARTS CHART

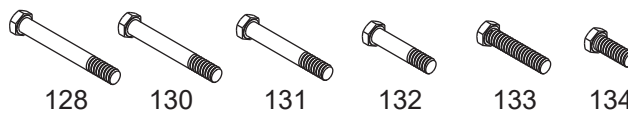NO.	DESCRIPTION	QTY.						
122	1/2" X 4-1/4" HEX BOLT	4						
123A	1/2" X 3-1/4" HEX BOLT	2						
125	3/8" X 5-3/4" HEX BOLT	1						
126	3/8" X 4-3/4" HEX BOLT	2						
128	3/8" X 3" HEX BOLT	24						
130	3/8" X 2-3/4" HEX BOLT	1						
131	3/8" X 2-1/2" HEX BOLT	2						
132	3/8" X 1-3/4" HEX BOLT	22						
133	3/8" X 1-3/4" HEX THREADED BOLT	4						
134	3/8" X 1" HEX THREADED BOLT	10						
135	5/16" X 1/2" HEX THREADED BOLT	16						
136	5/16" X 1-1/2" HEX BOLT	2						
137	5/16" X 5/8" ROUND BOLT	2						
138	3/8" X 3/4" INNER SET SCREW	3						
139	3/8" X 1/2" ROUND BOLT	4						
140	3/8" X 5/8" SET SCREW	2						
141	5/16" X 1/4" SET SCREW	6						
142	TOP PLATE BOLT	2						
143	8mm X 53mm FEMALE BOLT FOR POSTER	3						
144	6mm X 12mm MALE NUT FOR POSTER	3						
146	1/2" WASHER	14						
147	3/8" WASHER	76						
148	5/16" WASHER	18						
149	3/8" SPRING WASHER	4						
150	5/16" SPRING WASHER	2						
151	24mm NYLON NUT	2						
153	1/2" NYLON NUT	8						
154	3/8" NYLON NUT	53						
155	5/16" NYLON NUT	2						
156	3/8" X 1" INNER HEX SCREW	4						
157	5/16" X 1-1/4" SUNKEN HEAD SCREW	6						
158	5/16" NUT	6						
159	1-1/4" HAND GRIP	2						
160	1" T SHAPE END PLUG	2						
161	HOOK PLATE	1						
162	COLLAR	2						
163	SEALING RING	2						
164	M6 SET SCREW	2						
165	5/16" X 5/8" SET SCREW	1						
166	M5 X 18mm ROUND HEAD SCREW	2						
167	M5 NYLON NUT	2						
168	5/16" LARGER WASHER	6						
170	LINK CHAIN	1						
171	CABLE GUIDE PLATE	1						
172	3mm HEX WRENCH	1						
173	4mm HEX WRENCH	1						
174	5mm HEX WRENCH	1						
175	6mm HEX WRENCH	1						


*Parts images are not to scale.

COMPLETE PARTS CHART

NO. DESCRIPTION QTY.

201	BASE STABILIZER	1
202	LEG PRESS MAIN FRAME	1
203	LEFT LEG PRESS HANDLE	1
204	RIGHT LEG PRESS HANDLE	1
205	LONG LEG PRESS CONNECTOR	1
206	FRONT LEG PRESS SUPPORT	1
207	WEIGHT BASE CONNECTOR	1
208	WEIGHT STACK BASE	1
209	REAR LEG PRESS SUPPORT	1
210	FOOT PLATE CONNECTOR	1
211	FOOT PLATE	1
212	BACK PAD ADJUSTER	1
213	LEG PRESS CABLE	1
214	STEEL TUBE	1
215	51102 BEARING	1
216	BEARING COVER	1
217	BEATING BASIN	1
218	1008 "C" PIN	1

13	GUIDE ROD	2
35	WEIGHT STACK SHROUD	2
54	LEG PRESS AXLE	3
61	75 X 45mm RECT. CAP	1
62	50mm SQ. CAP	2
63	45 X 75mm RECT. PLUG	3
64	50mm SQ. PLUG	2
65	45mm SQ. PLUG	1
70	BEARING HOUSING	2
71	SPACER	2
72	PLASTIC GUIDE ROD HOLDER	4
75	25.4mm STEEL BUSHING	6
79	SPRING KNOB	1
80	SELECTOR PIN	1
82	114mm PULLEY	7
84	RUBBER DONUT	2
87	STOPPER	1
90	1" X 200mm HAND GRIP	2
94	SELECTOR ROD	1
95	TOP PLATE	1
96	10 LB. PLATE	19
104	BACK PAD	1
105	SEAT PAD	1
106	TRIM FOR WEIGHT SHROUD	4
121	5/8" X 6-1/2" HEX BOLT	3
123B	1/2" X 3-1/8" HEX BOLT	2
124	1/2" X 1-3/4" HEX THREADED BOLT	4
127	3/8" X 4-1/4" HEX BOLT	4
128	3/8" X 3" HEX BOLT	2
129	3/8" X 2-3/4" HEX THREADED BOLT	1
130	3/8" X 2-3/4" HEX BOLT	1
132	3/8" X 1-3/4" HEX BOLT	5
134	3/8" X 1" HEX THREADED BOLT	4
135	5/16" X 1/2" HEX THREADED BOLT	8
138	3/8" X 3/4" SET SCREW	1
142	TOP PLATE BOLT	1
145	5/8" WASHER	6
146	1/2" WASHER	18
147	3/8" WASHER	19
148	5/16" WASHER	8
152	5/8" NYLON NUT	3
153	1/2" NYLON NUT	8
154	3/8" NYLON NUT	13
169	1/2" X 1-1/4" HEX THREADED BOLT	4
172	3/8" X 2-1/4" HEX THREADED BOLT	1

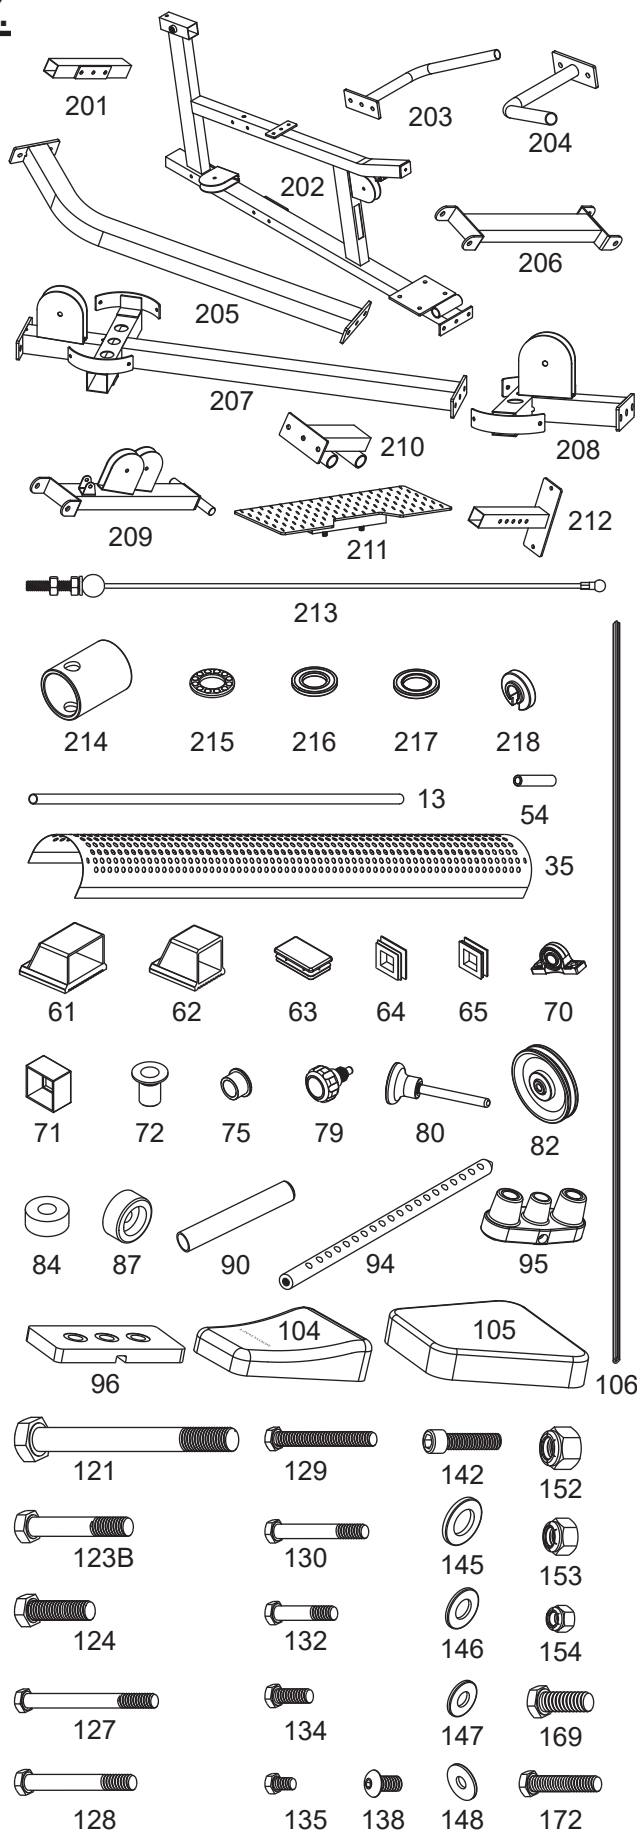


*Parts images are not to scale.

COMPLETE PARTS CHART


NO.	DESCRIPTION	QTY.
-----	-------------	------

301	WEIGHT STACK BASE	1
302	TOP GUIDE ROD RETAINER	1
303	FRONT STABILIZER	1
304	CABLE HEIGHT ADJUSTER	1
305	SWIVEL PULLEY BRACKET	2
306	CHROMED UPRIGHT	1
307	HAND HOLDER	1
308	DOUBLE PULLEY BRACKET	1
309	90mm PULLEY	10
310	3/8" BUSHING	8
311	1-1/4" PLUG	2
312	6205Z BEARING	4
313	STEEL SPACER	2
314	CABLE COLUMN CABLE	1
315	REMOVABLE END CABLE ARM CABLE	1
316	HAND GRIP	2
317	1" X 210mm HAND GRIP	1
318	3/8" X 3-1/8" HEX HEAD BOLT	2
319	NONSLIP	2
320	50 X 100mm PULLEY HOUSING COVER	2
13	GUIDE ROD	2
35	WEIGHT STACK SHROUD	2
64	50mm SQ. PLUG	3
67	50 X 75mm RECT. PLUG	2
72	PLASTIC GUIDE ROD HOLDER	4
79	LOCKING SPRING KNOB	1
80	SELECTOR PIN	1
82	114mm PULLEY	2
84	RUBBER DONUT	2
86	CAP	2
94	SELECTOR ROD	1
95	TOP PLATE	1
96	10 LB. PLATE	19
97	SNAP HOOK	3
98	PLASTIC BUSHING	2
100	SINGLE HANDLE	2
101	ANKLE STRAP	1
106	TRIM FOR WEIGHT SHROUD	4
128	3/8" X 3" HEX BOLT	7
132	3/8" X 1-3/4" HEX BOLT	6
135	5/16" X 1/2" HEX THREADED BOLT	8
142	TOP PLATE BOLT	1
146	1/2" WASHER	4
147	3/8" WASHER	15
148	5/16" WASHER	8
151	24mm NYLON NUT	2
154	3/8" NYLON NUT	14
169	1/2" X 1-1/4" HEX THREADED BOLT	4

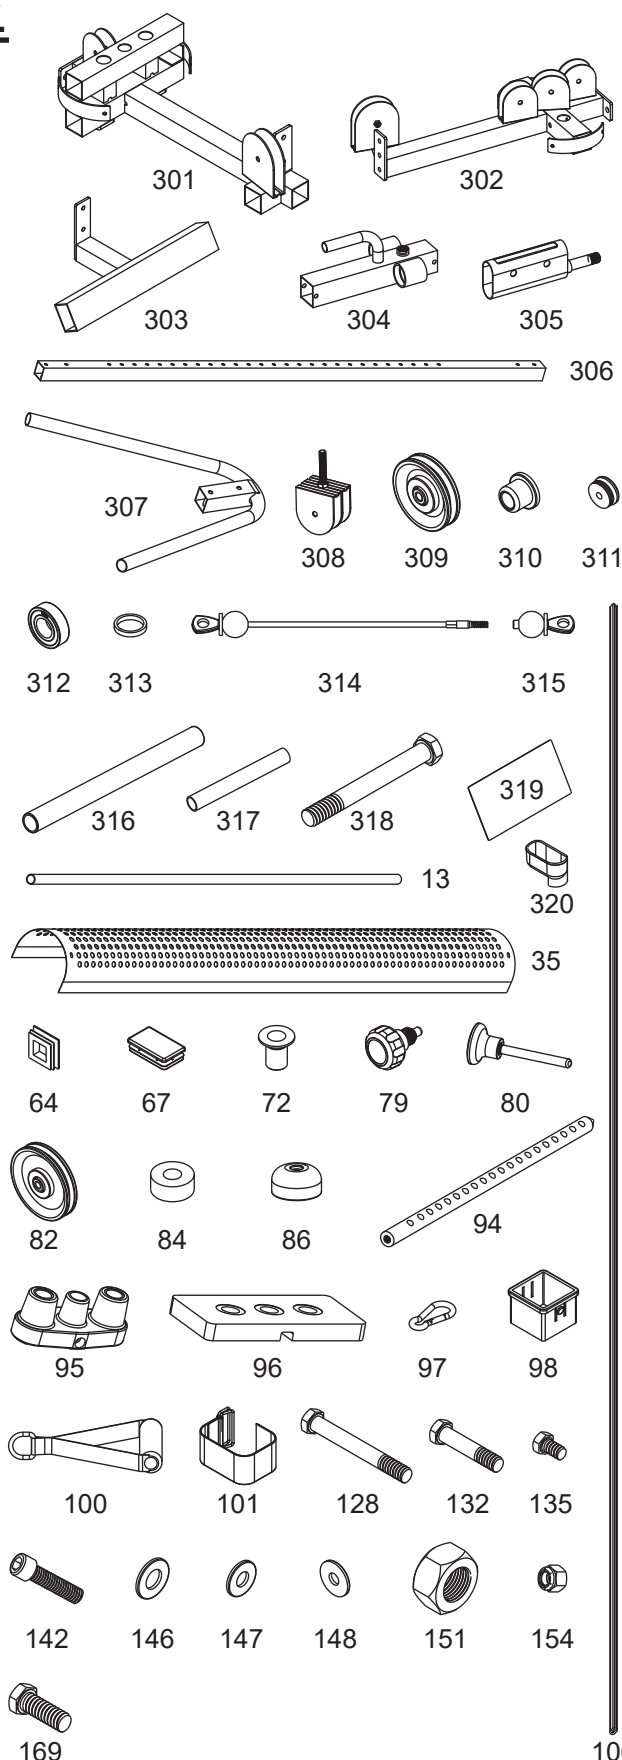


*Parts images are not to scale.


OVERVIEW (3-1)

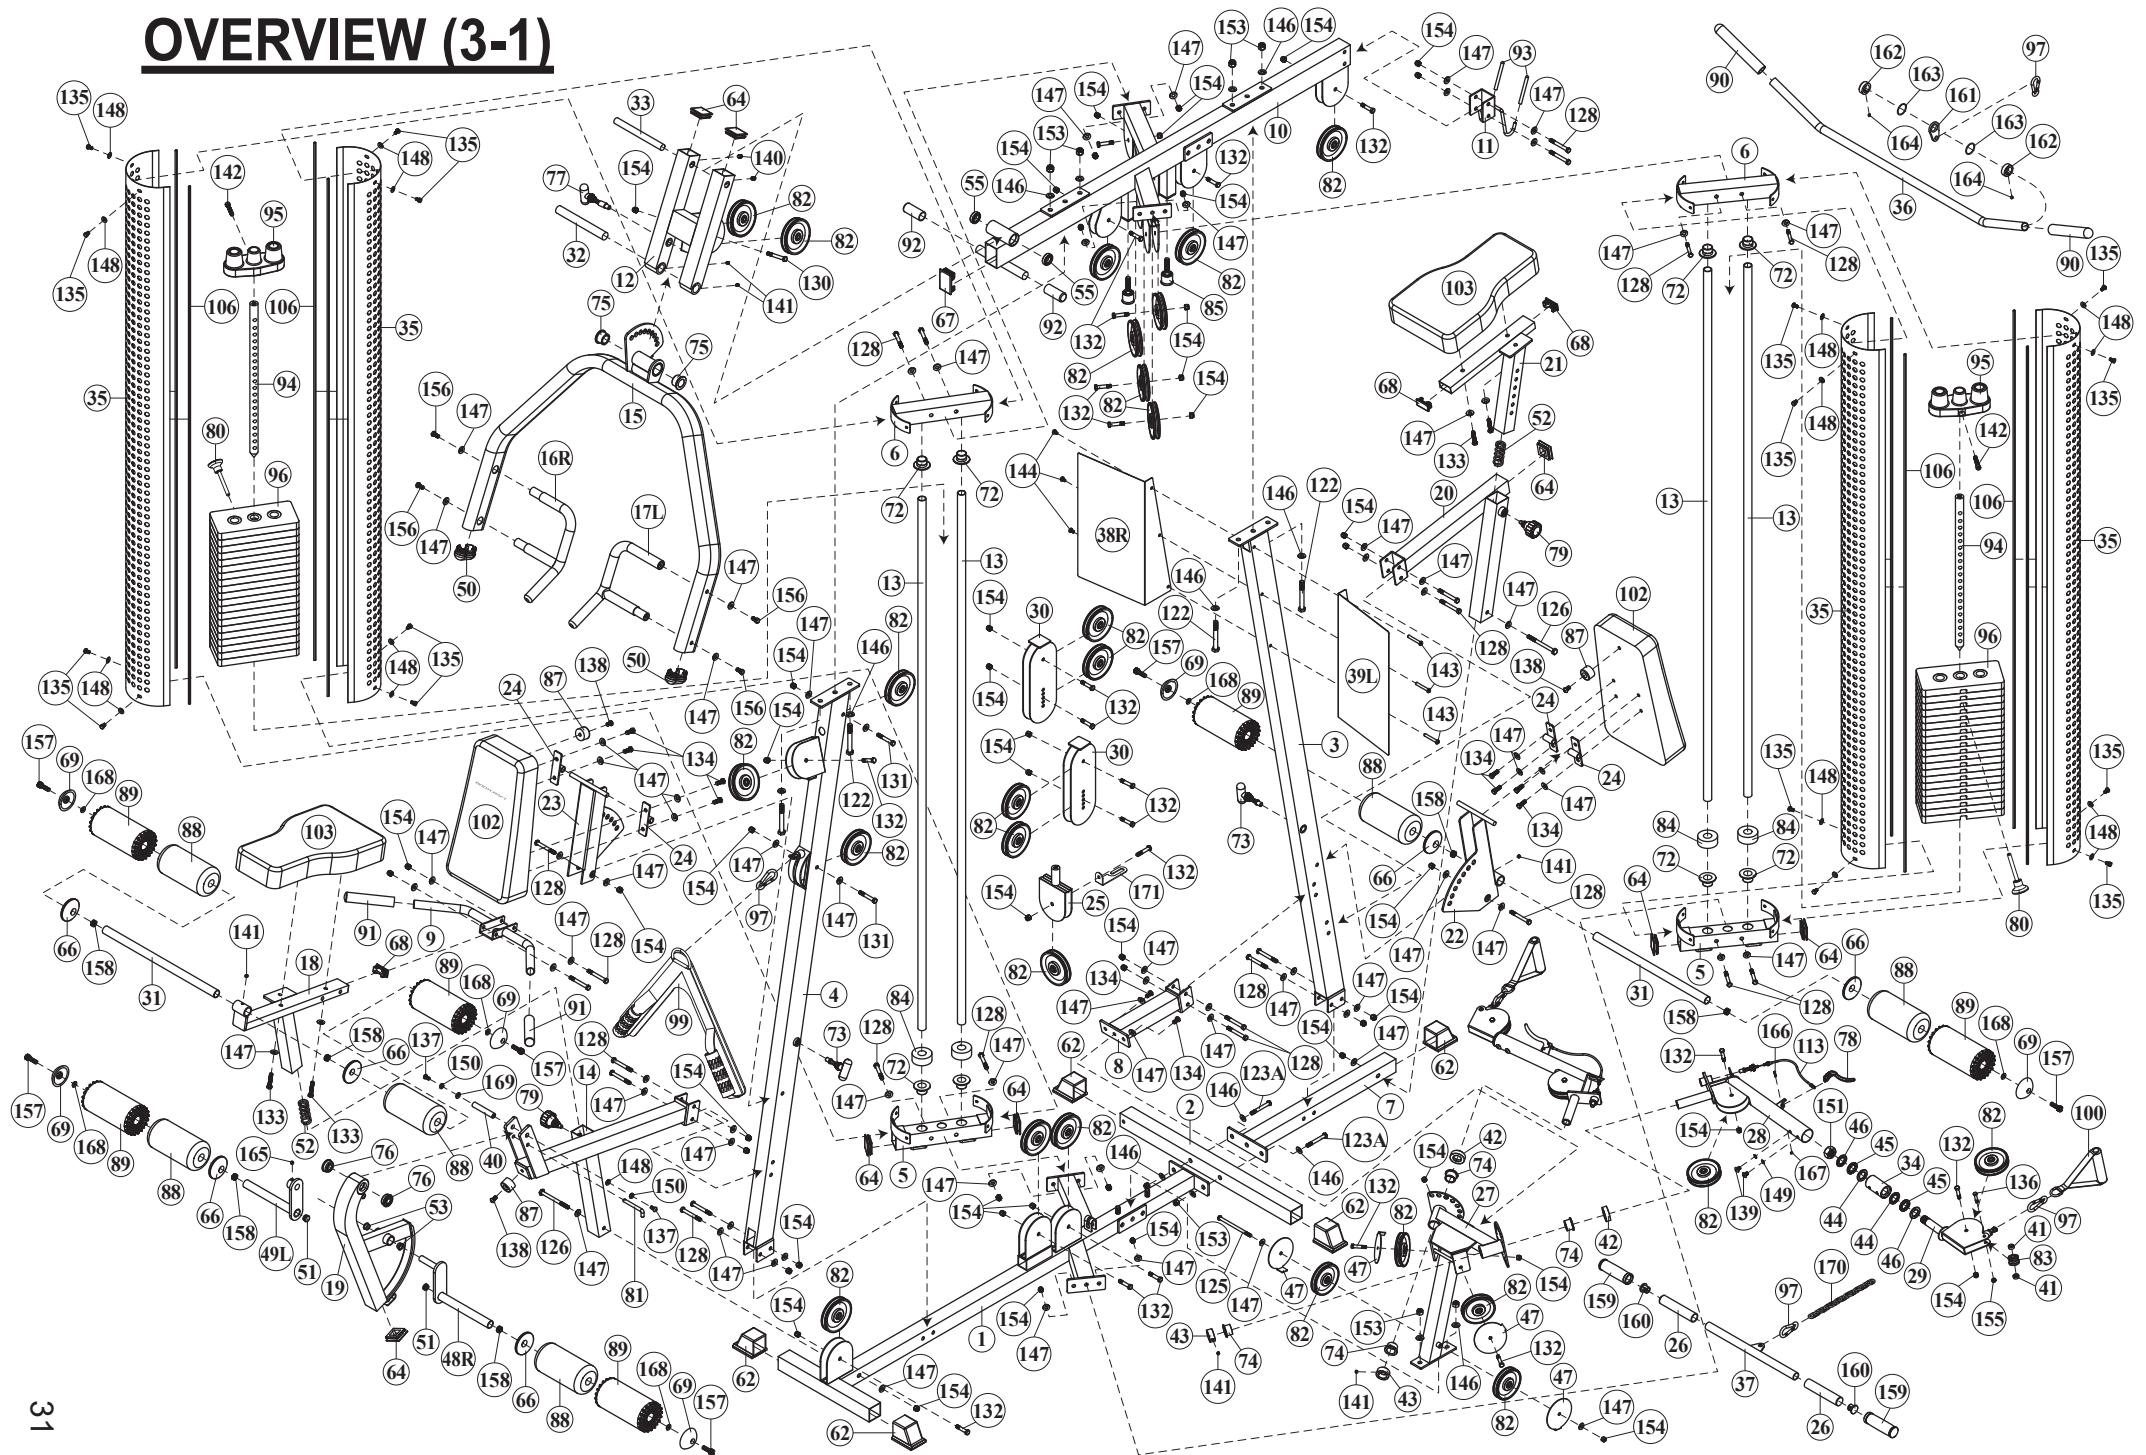

OVERVIEW (3-3)

33

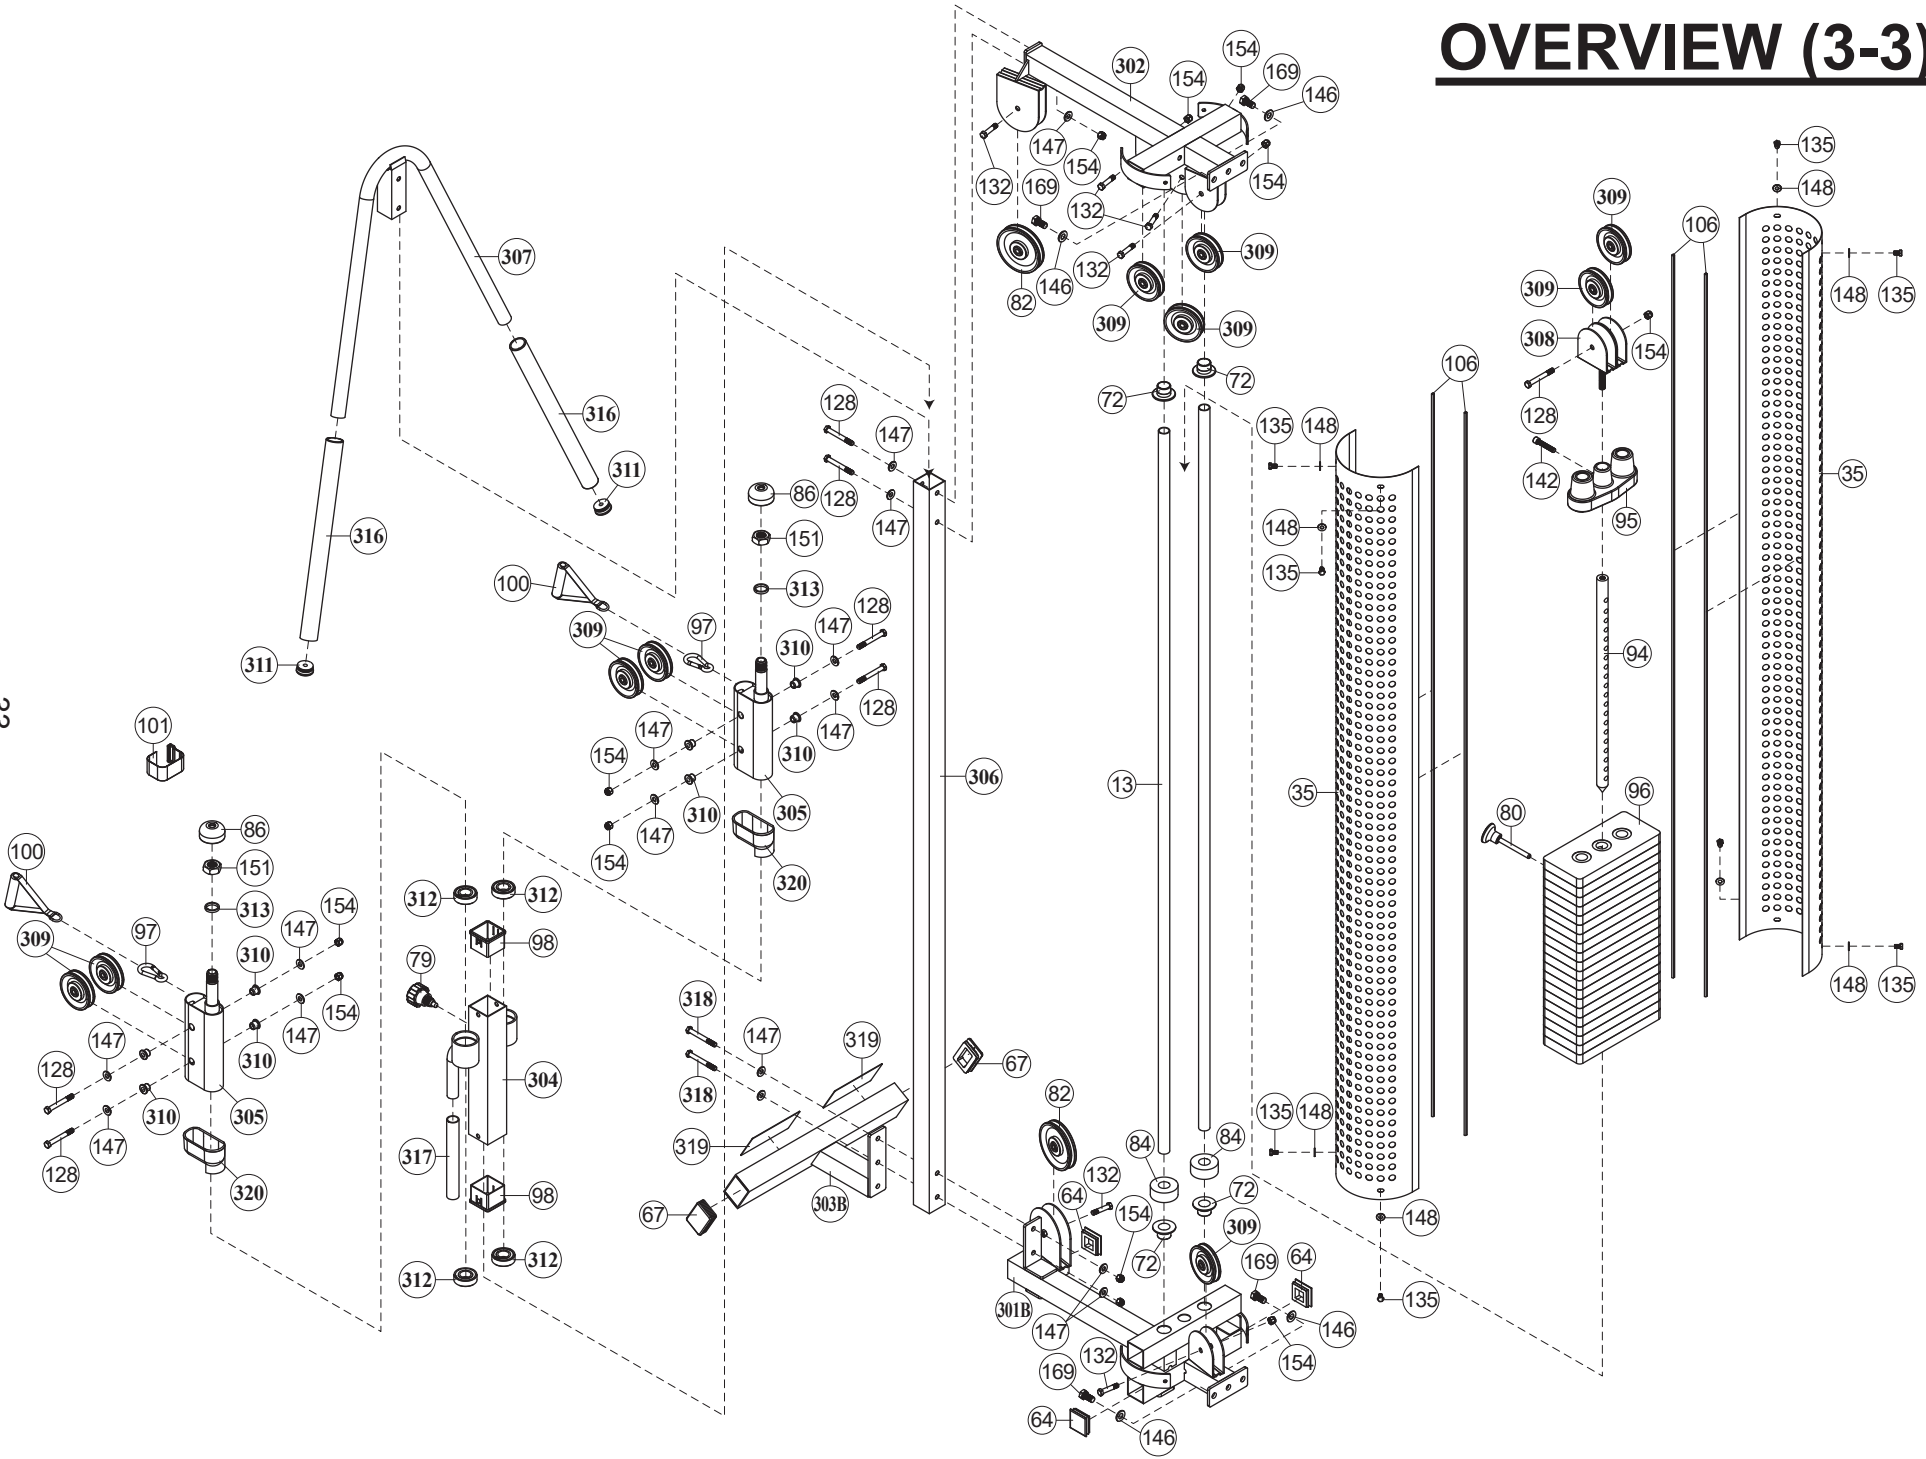

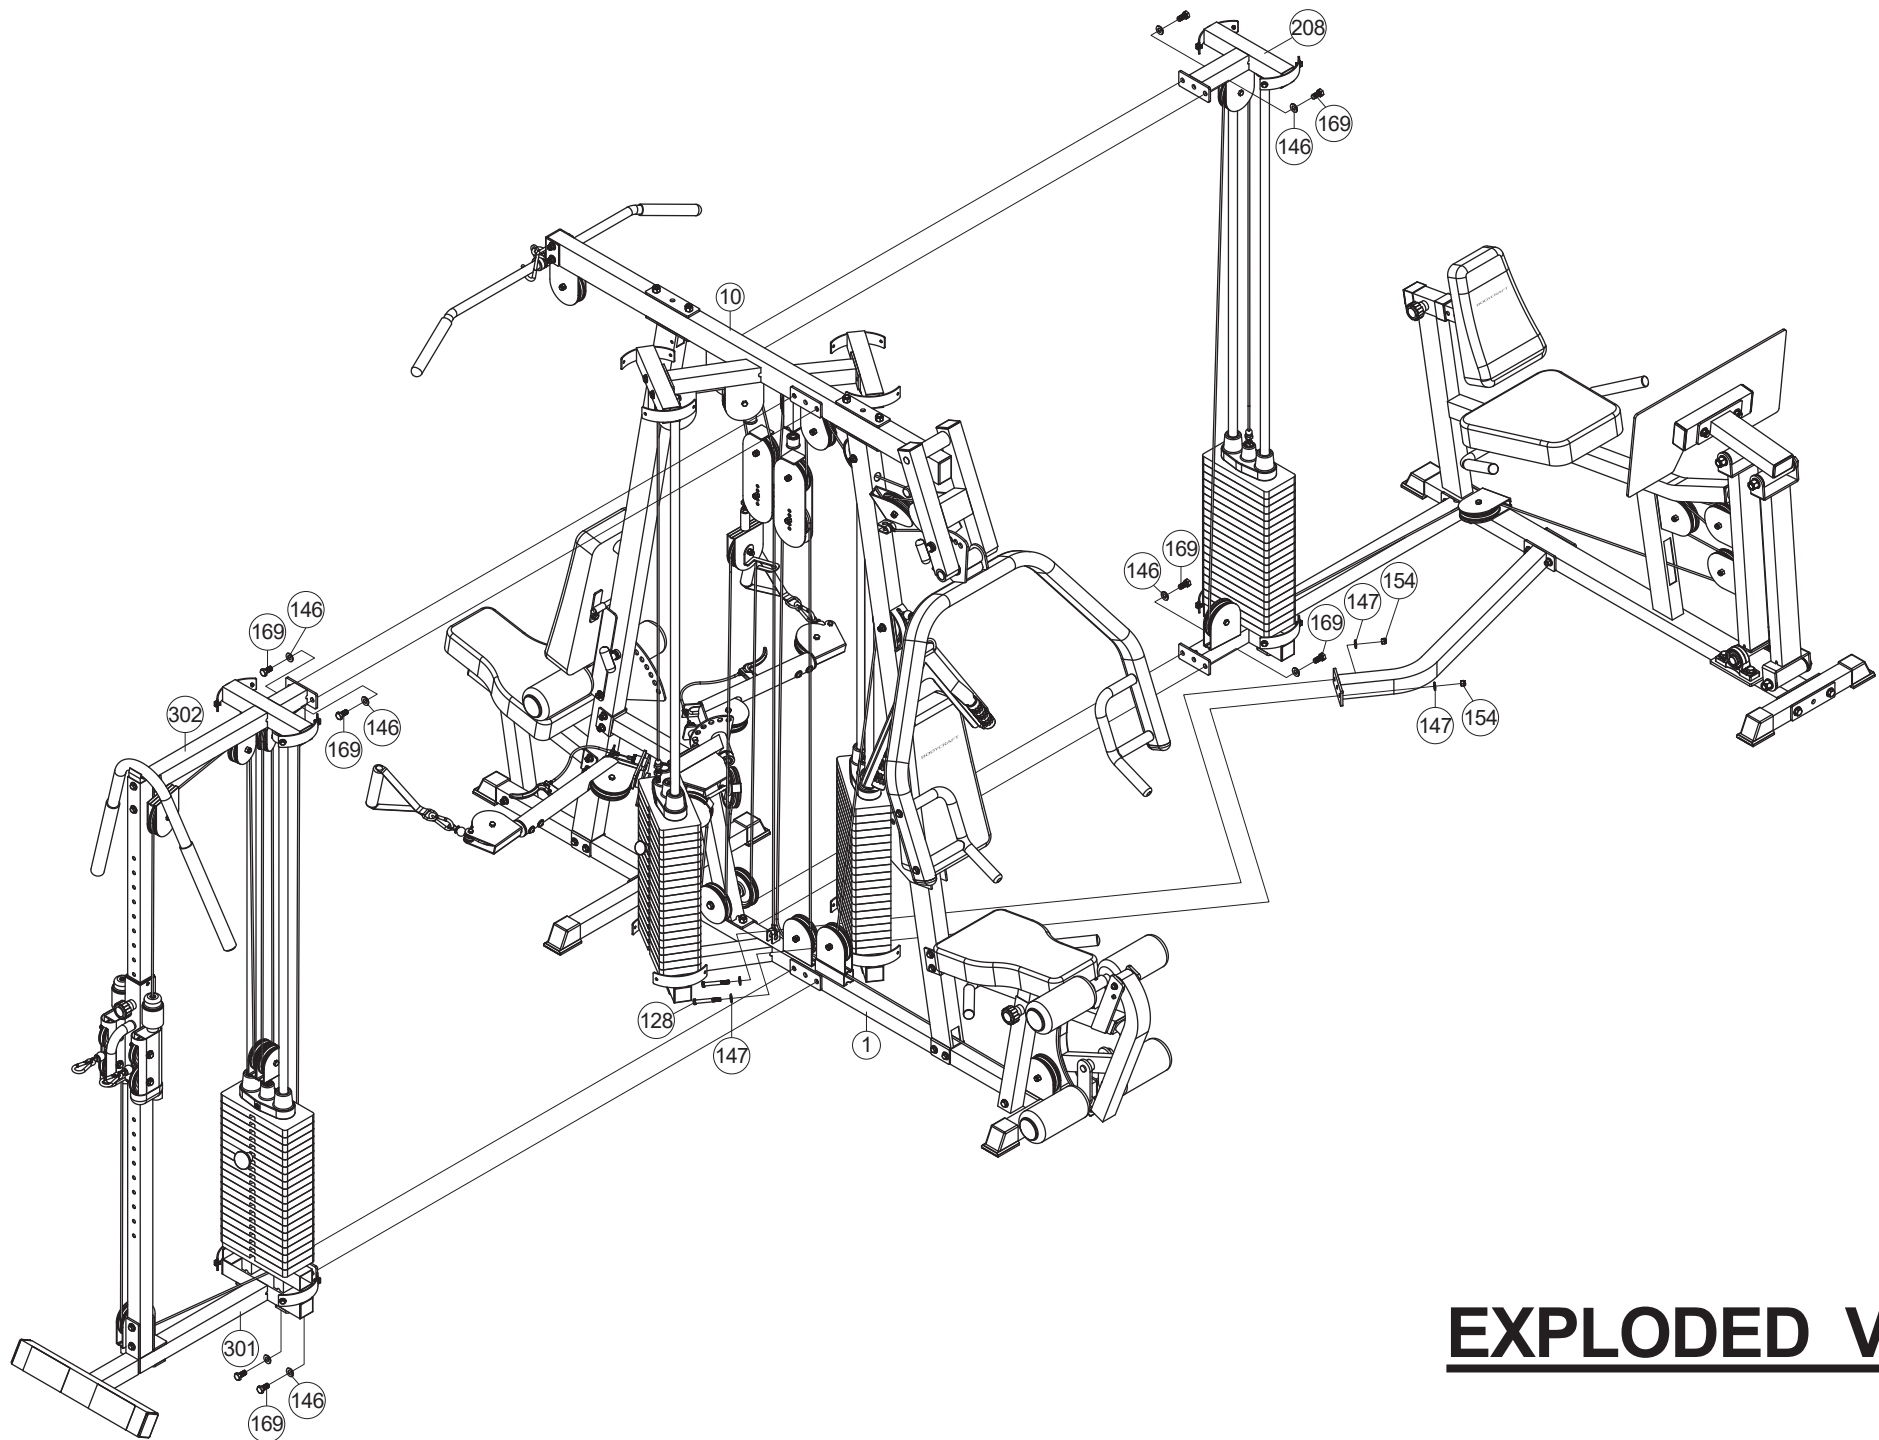

EXPLODED VIEW

Assembly is complete! Please take the following steps before using the gym:

1. Make certain all bolts are tightened securely.
2. Make certain all cables are seated into all pulley grooves. A cable rubbing against steel will peel the nylon coating, voiding warranty and resulting in a need for replacement.
3. Pre-stretch the cables. Put the Magnetic Selector Pin (80) in the bottom hole on the weight stack. Pull on the cables with great force, helping remove any kinks and providing any initial cable stretch.
4. Be aware the cables can loosen and slightly stretch upon initial use.
5. The cables should be adjusted as tight as possible, but not so tight as to lift the Top Plate (95) above the weight stack. Be certain to secure the jam nuts after adjustments are made.
6. For better performance, apply a household lubricant (such as silicone) to any adjustable areas and to the Guide Rods (13).
7. Enjoy many years of a Fit Lifestyle.

Thank you for purchasing the BODYCRAFT LCS-4 Gym!
If You have any questions or comments, please contact your local
BODYCRAFT dealer. www.ibodycraft.com